

# DESIGN AND SIMULATION OF POLYGON PATCH ANTENNA WITH CIRCULAR SLOT USING MICROWAVE BAND APPLICATIONS

S. Parameswari<sup>1</sup> U.Anitha<sup>2</sup> M.Anitha<sup>3</sup> Esakkiammal<sup>4</sup> <sup>1</sup> Assistant Professor, UG Students <sup>2,3,4</sup> Electronics and communication Engineering Kalasalingam Institute of Technology Krishnankoil, Tamilnadu, India

**Abstract**— in this paper, a single rectangular microstrip patch antenna with polygon and circular slot is designed. The antenna is designed for C and X band applications. The shape of the antenna is obtained by assigning the coordinate values to each part. A cut is given in the middle of the rectangle and also inside the polygon and circular slot to enhance the performance. Microstrip feed technique is used. In this paper discussed with two different antennas performance had been analyzed.

**Keywords**— Microstrip patch antenna , C and X band application, Microstrip feed, communication antenna.

## I. INTRODUCTION

Antenna is a major critical component of the wireless communication system, which is a key building block for constructing every wireless communication systems. Recently there are many advanced technologies in the field of wireless technology. Though there are many types of antennas present, the Microstrip patch antennas are highly used in the wireless communication because they has better gain , bandwidth and easy to design. Microstrip antenna is also known as printed antenna. It plays a vital role in wireless communication field.

Microstrip antennas are simple to construct by using fabrication technique. This type of antennas is now used in designing textile antennas. These antennas consist of a radiating patch on top of the dielectric substrate and also have a ground plane on the bottom side.

In microstrip patch antenna the patch is cut by polygon and circle to gain high efficiency It is capable of producing high Gain and Directivity.

The existing antenna is a square shaped body centered antenna at a size of 80 millimeter on all sides. It is a patch antenna with coaxial feed is

Polygon shaped microstrip slot antenna for dual band operation. The dual bands are achieved by placing ring slot in the conventional polygon microstrip antenna

A new patch antenna which is proposed is a polygon and circular slots and also the cut in the rectangular patch area are subtracted from the microstrip antenna.

## II. MATH

The Length and width of the patch is founded by the formula given

1.  $L = L_{eff} - 2\Delta L$
2.  $W = C/2f_0 \sqrt{(\epsilon_r + 1)/2}$

Where,

$\epsilon_r$  - Represents the real value of the dielectric material used.

$L_{eff}$  - Effective length of the patch

The Change in Length of the Patch is given by the following formula

$$\Delta L = 0.412h \frac{(\epsilon_{eff} + 0.3) \left( \frac{W}{h} + 0.264 \right)}{(\epsilon_{eff} - 0.258) \left( \frac{W}{h} + 0.8 \right)}$$

Where,

$h$  – represents the thickness

$W$  – represents the width of the patch

The other formulas used are

$$L_{eff} = C/2f_0 \sqrt{\epsilon_{eff}}$$

$$\epsilon_{eff} = (\epsilon_r + 1/2) + (\epsilon_r - 1/2)(1 + 12h/w)$$

### III. Bakelite Polygon Patch Antenna

The Proposed antenna design is shown in the Fig. 1. The antenna is of polygon and circular slot with a microstrip patch on the bottom. Here the Ground layer is defined as the infinite or boundary less region. The HFSS (High Frequency Structural Simulator) Software is used to design the proposed antenna. In this software the 3D radiation pattern is obtained and the output parameters are easily calculated. The shape of the antenna is obtained by assigning the coordinate values for each part.

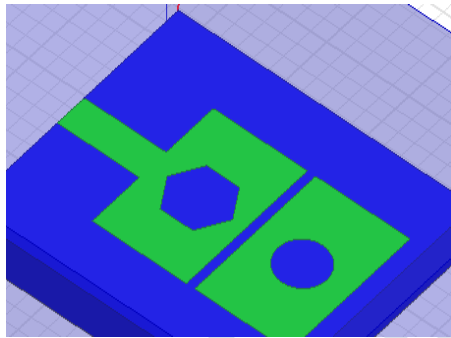


Fig.1. Proposed Antenna Design

A cut is given in the middle in the form of a rectangle shape on layer of the patch. There is only one port P1 placed at the bottom and connected together with the feed. The substrate material used here is Bakelite which is better performance material.

The height of the substrate layer is equal the conductor material layer. After the designing was completed, the port values are assigned to the antenna. The thickness of the substrate material is 2 millimeter and the conductor material is 35 micron. The adaptive frequency is from 5GHz to 10 GHz

### IV Result and Discussion

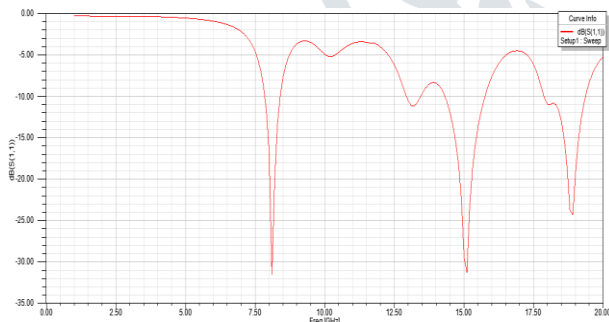


Fig.2. Return Loss of the antenna

Return loss shows the loss of power returned or reflected back. It shows the backside radiation of the designed antenna. Here the return loss is -26.7dB which is greater than the cut off value. So the return loss is very less and there is no backside radiation produced.




Fig.3. Radiation pattern for Bakelite

Here no backside lobe is present but there are lobes present on the sides of the main lobe.

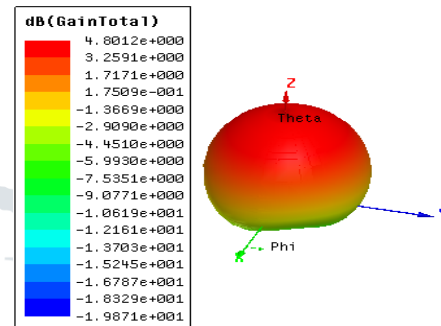


Fig 3.Gain of the Bakelite antenna

The Gain and Directivity are the important component of the Antenna constructed. The Gain of the antenna is 4.80 dB and the Directivity is 4.91 dB, shows that better results are produced

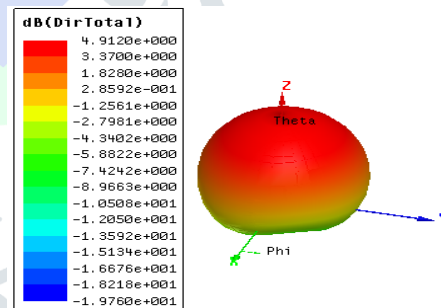


Fig 4. Directivity of the Bakelite Antenna

The Efficiency of the antenna designed is 79.58%, which is a good level of working of the designed antenna.

### V CONCLUSION

A microstrip patch antenna is designed with polygon and circular slot in it. The results of Bakelite material are used in this paper. In future work different materials are used in same antenna design methodology

## V REFERENCES

- [1] P. S. Hall and Y. Hao, Eds., *Antennas and Propagation for Body-Centric Wireless Communications*, 2nd ed. Norwood, MA, USA: Artech House, 2012.
- [2] H. J. Lee, K. L. Ford, and R. J. Langley, "Switchable on/off-body communication at 2.45 GHz using textile microstrip patch antenna on stripline," *Electron. Lett.*, vol. 48, no. 5, pp. 254–256, Mar. 2012.
- [3] J. Tak, S. Woo, J. Kwon, and J. Choi, "Dual-band dual-mode patch antenna for on-/off-body WBAN communications," *IEEE Antennas Wireless Propagation Lett.*, vol. 15, pp. 348–351, 2016.
- [4] D. H. Werner and Z. H. Jiang, Eds., *Electromagnetics of Body Area Networks: Antennas, Propagation and RF Systems*. Piscataway, NJ, USA: IEEE Press, 2016.
- [5] X. Q. Zhu, Y. X. Guo, and W. Wu, "Miniaturized dual-band and dual polarized antenna for MBAN applications," *IEEE Trans. Antennas Propag.*, vol. 64, no. 7, pp. 2805–2814, Jul. 2016.
- [6] Q.H.Abbasi, M.U.Rehman, K. Qarage, and A. Alomainy, Eds., *Advances in Body-Centric Wireless Communication: Applications and State-of-the-Art*. Stevenage, U.K.: IET Press, 2016.
- [7] C. Mendes and C. Peixeiro, "On-body offbody dual-mode microstrip antenna for body area network applications," in *Proc. Eur. Conf. Antennas Propag.*, Davos, Switzerland, Apr. 2016, pp.1–3
- [8] R. B. V. B. Simorangkir, Y. Yang, L. Matekovits, and K. P. Esselle, "Dualband dual-mode textile antenna on PDMS substrate for body-centric communications," *IEEE Antennas Wireless Propag. Lett.*, vol. 16, pp. 677–680, 2017.
- [9] C. L. Mak, K. M. Luk, K. F. Lee, and Y. L. Chow, "Experimental study of a microstrip patch antenna with an L-shaped probe," *IEEE Trans. Antennas Propag.*, vol. 48, no. 5, pp. 777–783, May 2000.
- [10] G. A. Conway and W. G. Scanlon, "Antennas for over-body-surface communication at 2.45 GHz," *IEEE Trans. Antennas Propag.*, vol. 57, no. 4, pp. 844–855, Apr. 2009.