

# ADAPTIVE DROOP CONTROL IN ENERGY STORAGE SYSTEM FOR BATTERY PROTECTION MICROGRID

Komirishetti shiva  
UG student  
[Shivakomirisetti83@gmail.com](mailto:Shivakomirisetti83@gmail.com)

S. Chiranjeevi S Srinivas  
UG student  
[srinuvirat007@gmail.com](mailto:srinuvirat007@gmail.com)

Nagireddi Rajesh  
UG student  
[nagireddirajesh34@gmail.com](mailto:nagireddirajesh34@gmail.com)

Mr. K Narendra babu  
Assistant Professor  
[narendra@giet.ac.in](mailto:narendra@giet.ac.in)

Department of Electrical and Electronics Engineering  
Godavari Institute Of Engineering and Technology (A), Rajahmundry, A.P, India

## Abstract

This paper proposes an alternative strategy to control the generated power within an isolated ac microgrid with distributed RES. The proposal is to control the terminal voltage of the existing battery banks below or equal its maximum allowable value. This is done by limiting the amount of power that each energy source can generate at each instant. The microgrid frequency is used to characterize the state of charge of the battery bank and quantify to the converters' control systems how much power they need or can generate to maintain under control the internal power balance of the microgrid. The control of the battery banks' terminal voltage implies indirectly the control of their SOC.

**Keywords:** Battery banks, isolated microgrids, parallel inverters, power control, renewable energy sources (RESs), state of charge (SOC).

## I. INTRODUCTION

Micro grids are turning into famous of assignment structures because she be able enhance the monitoring quality or reliability on control resources or limit the environmental impact. Micro grid act be able remain classified in twain modes: gridconnected or islanded modes. In general, micro grids are comprised about distributed energy sources (DERs) inclusive of renewable power sources, distributed power tankage systems (ESSs), or partial hundreds [1-3]. However, the usage on renewable energy sources such as breeze then photo voltaic control of micro grids motives monitoring go with the flow versions due in imitation of uncertainties among theirs monitoring outputs. These editions have to remain decreased to forgather power-quality requirements [4,5]. This discipline focuses about coping with the issues as are added by means of air power. To compensate because of fluctuations into breeze power, various ESSs have been implemented between micro grids. Short-term ESSs such as much superconducting magnetic energy storage (SMES) structures [6], electrical double-layer capacitors (EDLCs) [7], then flywheel energy storage systems (FESSs) as like nicely as much long-term ESSs certain as like battery strength tankage systems (BESSs) [8-9] are utilized after micro grid control. ESSs perform additionally remain back after limit the rule glide at factor about frequent merger among the grid-connected passion namely properly namely in accordance with modify the frequency and voltage about a micro grid within the islanded mode. Among this ESSs, BESSs have been implemented extensively due in accordance with their versatility, excessive strength density, and efficiency. Moreover, their charge has decreased inasmuch as their performance or breath has increased. In practice, BESSs along excessive overall performance such as much clean and quickly strong answer throughout charging then discharging are required for Microgrid control. This overall performance depends on the government overall performance concerning the government electronic converter. Proportional-integral (PI) control is a realistic yet popular control method because BESS monitoring systems. However, PI rule may exhibit unsatisfactory consequences because nonlinear or discontinuous systems [10]. When proper applied, these new, allotted technology gadgets (DG) offer great advantage in conformity with the grid then in imitation of cease users. However, merging DGs between the regular grid is no longer barring empirical challenges. The typical electrical grid was now not designed for power generation sources dispensed close to the ends concerning the T&D grid. The successful integration over DG government sources requires the single-direction grid structure about the previous transit after a smarter then greater agile bi-directional grid [11]. As DGs proceed after obtain drawing among the electric market, instant wondering yet recent strategies round power generation, parcelling then bad desire proceed after emerge. One over the an increasing number of frequent techniques because merging DGs into the large electric grid is a new twist over an ancient electrical architecture recognized so the Microgrid. Micro grids are areas about the grid so much do function as like section on the larger macro grid then operate autonomously as like a standalone system.

The micro grid systems help facilitate the integration of DG belongings within the large electric grid. Further, when true implemented, micro grids execute unbolt a large adjust regarding stacked values for grid operators and electrified customers toughness [12].

**II. SYSTEM DESCRIPTION**

Fig. 1 illustrates the simplified diagram of a stand-alone Microgrid used to explain the control strategy proposed in this paper. It consists of a GFC, a GSC, and a battery bank. The renewable energy source, in this particular study, is a variable speed wind turbine coupled to a permanent-magnet synchronous generator (PMSG). Depending on the system size, other energy sources and other storage energy systems can be distributed along the Microgrid. The simplicity of this system is useful to show the feasibility of the proposed control strategy without losing generality.

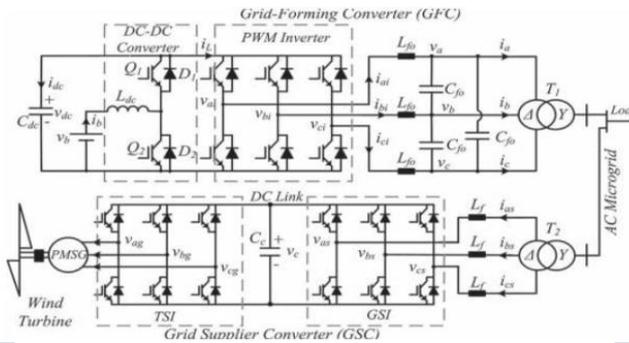


Fig.1. Simplified Diagram of the Studied Microgrid

The GFC is a bidirectional converter formed by a pulse width modulation (PWM) three-phase inverter and a dc-dc converter that works in a buck mode when the battery bank is undercharge or in a boost mode when it is under discharge. The PWM inverter controls the magnitude and frequency of the Microgrid.

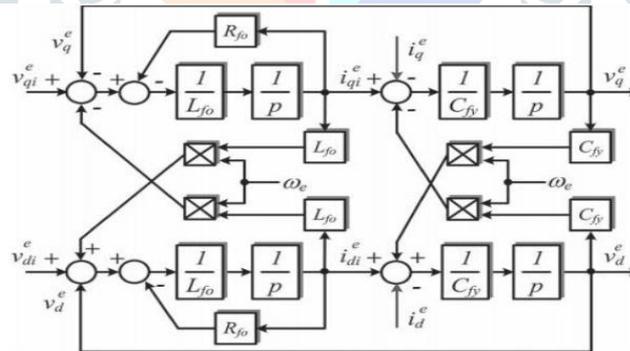


Fig.2. Block Diagram of LC Filter Implemented in a Synchronous Reference Frame

Voltage, while the dc-dc buck or boost converter is used to control the voltage at the dc bus capacitor (Cdc) which is the dc bus voltage as well as the charging and discharging of the battery bank. The GSC is used to control the power generated by the renewable energy source. In this particular example, the converter is formed by a conventional back-to-back topology [12]. It has a grid-side PWM inverter (GSI) and a wind turbine-side PWM inverter (TSI). The GSI is used to control the dc-link voltage of the back-to-back topology, and the TSI is used to control the power generated by the wind turbine based on a maximum power point tracker (MPPT) algorithm.

**III. GRID FORMER CONVERTER**

**A. Control of the Microgrid Voltage and Frequency**

The Microgrid voltage controller utilizes the conventional design executed on a synchronous dq reference outline, with an inward current circle and an external voltage circle [7]. The recurrence and voltage reference esteems are computed utilizing a hang control methodology as a component of the dynamic and responsive forces, separately, at the lattice previous converter terminals. The dq model of the LC channel in the delta side of transformer T1 (see Fig. 1) is utilized to plan the control circles of the GFC. The square graph of this model is appeared in Fig. 3, where Rfo is the equal arrangement protection of the channel inductor Lfo; ωe is the Microgrid recurrence in radians every second, the super script's" indicates factors in the dq synchronous reference frame, ied and i.e. q are the dq

streams in the delta side of transformer T1; C<sub>fy</sub> is the per-stage proportionate capacitance of the LC filter and is equivalent to 3C<sub>f0</sub>; and v<sub>qe</sub> and v<sub>de</sub> are the dq voltages in the capacitors of the LC channel. The subscript I signifies the yield factors of the GFC PWM inverter. All the square graphs appeared in this paper utilize the administrator p = d/dt. Based on the model displayed in Fig. 2, an inward current circle and an external voltage circle were planned, as outlined in Fig. 3.

In this figure,  $\hat{\Delta}$  denotes estimated parameters, and GDID1 is the transfer function used to decouple at the sample instants the effect of the disturbances due to the load currents i<sub>eqe</sub> and the cross-coupling due to v<sub>qe</sub> and v<sub>de</sub>. ZOH means zero-order hold (latch). Fundamentally, the current on the inductance L<sub>f0</sub> is controlled in order to regulate the voltage on the capacitance C<sub>f0</sub>, independently whether the power flux is from the PWM inverter to the Microgrid or vice versa. The voltage reference values for the voltage controllers can be constant, generally equal to the nominal value of the Microgrid voltage, or can be calculated based on a droop control strategy. In this paper, the voltage reference was fixed in 220 V(rms line voltage in the delta side of T1).

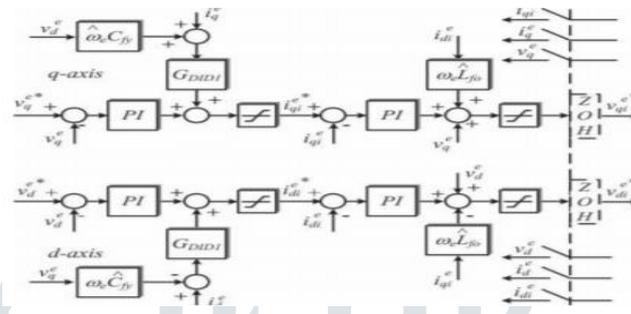


Fig.3. Block Diagram of the Microgrid Voltage Controller

**B. Control of the Bidirectional DC-DC Converter**

The dc-dc converter (in GFC) is utilized to control the voltage in the capacitor C<sub>dc</sub>. The activity of the controller of the dc-dc converter can be viewed as proportional to interfacing a controlled voltage source, with mean esteem V<sub>ct</sub>, between the xy terminals of the converter circuit, as appeared in Fig. 4(a) and (b). If the misfortunes in the converter are not viewed as, the voltage on C<sub>dc</sub> depends just on the contrast between the influence at the battery bank terminals (P<sub>b</sub>) and (P<sub>inv</sub>) which is the influence at the terminals of the delta side of the seclusion transformer T1, which is sure when the influence motion is from the inverter to the network and negative unexpectedly. This is appeared in Fig. 4(c). Therefore, the dynamic condition for v<sub>dc</sub> can be composed as in(1), where w<sub>dc</sub> is a helper variable characterized by w<sub>dc</sub> = v<sub>dc</sub>

$$\frac{1}{2} C_{dc} \frac{dv_{dc}^2}{dt} = \frac{1}{2} C_{dc} \frac{dw_{dc}}{dt} = P_b - P_{inv}$$

From (1) and Fig. 4, the dc bus voltage controller of the GFC can be designed with an inner current loop to control the battery bank current (i<sub>b</sub>) and an outer voltage loop to control the voltage over the capacitor C<sub>dc</sub>, as illustrated in Fig. 6.

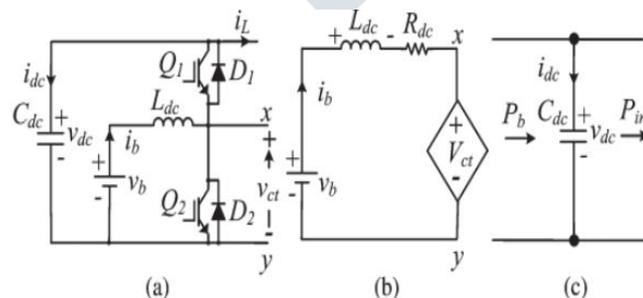


Fig.4. DC-DC Converter Average Model: (a) Original Circuit, (b) Equivalent Average Circuit of Inductor and Battery Bank, and (c) Average Model of the Bus Dc

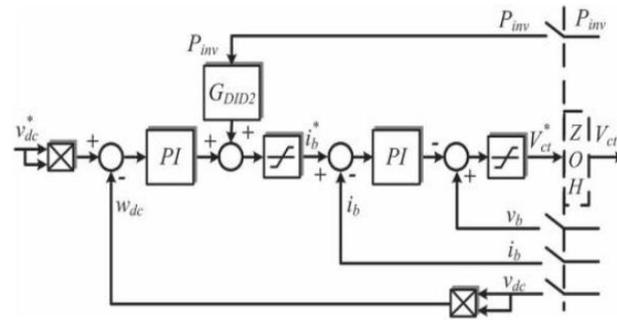


Fig.5. Block Diagram of the Voltage Controller of the Dc-Dc Converter

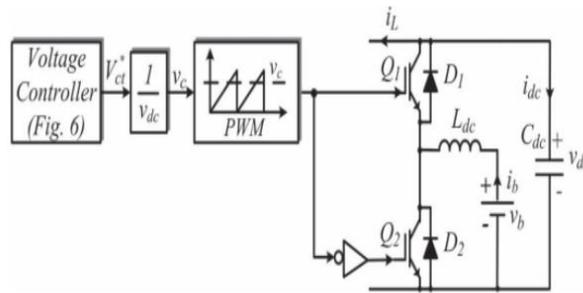


Fig.6. Block Diagram of the Commands for the Switches of the Dc-Dc converter

GDID2 is used to decouple the power disturbance from the output of the inverter over the dc bus voltage. The output of the voltage controller ( $V_{ct}$ ) is the reference value for the PWM block used to generate the control signal for Q1 or Q2 switches, as shown in Fig. 6 [4]. In Fig. 6, when  $P_{inv}$  is positive, the battery bank supplies the load, and the dc-dc converter functions on the boost mode using the Q2 switch and D1 diode. On the other hand, when  $P_{inv}$  is negative, the dc-dc converter functions on the buck mode using the Q1 switch and D2 diode.

**IV. GRID SUPPLIER CONVERTER**

*A. Control of the Injected Current in the Microgrid and the Voltage at the DC Bus*

In this paper, the GSI of the GSC (see Fig. 1) is used to control the dc bus voltage of the back-to-back topology. This controller uses an inner current loop to control the injected current in the microgrid. The current controller is implemented in a dq synchronous reference frame aligned with the Microgrid positive sequence voltage vector. The converter variable synchronization is done by using a synchronous phase-locked loop (PLL) that has a second order resonant filter tuned for the fundamental frequency of the Microgrid.

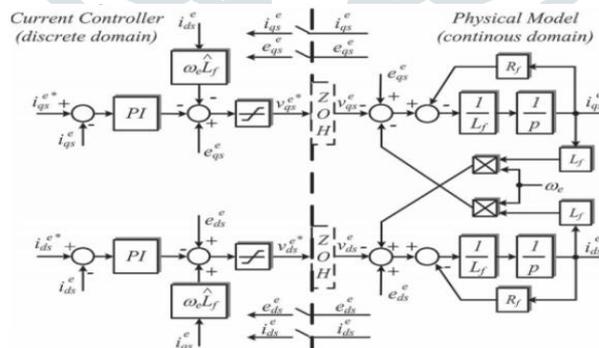


Fig.7. Block Diagram of the Control of the Injected Current in the microgrid by the GSC



$$f = f_0 - k_p P_{inv}$$

On the other hand, if the maximum voltage of the battery bank is reached, the Microgrid frequency is imposed to be always higher than the value  $f_{max}$ , which is the maximum frequency of operation of the conventional droop control strategy. This is illustrated by the hatched area in Fig.9. Now, the value of the frequency ( $f$ ) is a variable that changes dynamically

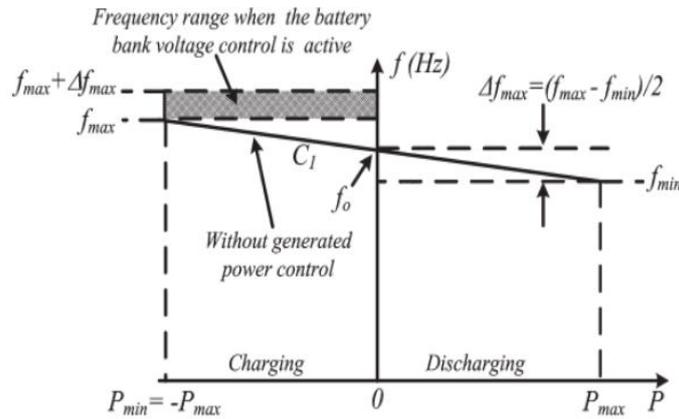


Fig.9. Frequency versus Power in the GFC Based on the Proposed Power Control

With the terminal voltage of the battery bank ( $v_b$ ), the power produced inside in the Microgrid ( $P_g$ ), and the energy of the GFC ( $P_{inv}$ ). This can be communicated by (9). As the estimation of the recurrence relies upon the progression of the battery bank voltage controller, its association with the power ( $P_{inv}$ ) does not take after an all around characterized arithmetical condition as, straight line. In this way, Fig. 10 indicates just a delineation that the recurrence can expect any an incentive amongst  $f_{max}$  and  $f_{max} + \delta f_{max}$ . In this working condition, it is important to confine the measure of energy that can be created by inexhaustible sources; generally, the honesty of the battery bank is in danger. The measure of energy that should be lessened from the most extreme power that each source can deliver at each minute has a guide connection to the recurrence distinction  $\Delta f = f - f_{max}$ . The estimations of  $f_0$  and  $\pm \delta f_{max}$  embraced in this work are 60 Hz and  $\pm 0.60$  Hz with the goal that the recurrence scope of the Microgrid is between 59.4 Hz (blade) and 61.2 Hz ( $f_{max} + \Delta f_{max}$ ).

$$f = f_{max} + \Delta f(v_b, P_g, P_{inv})$$

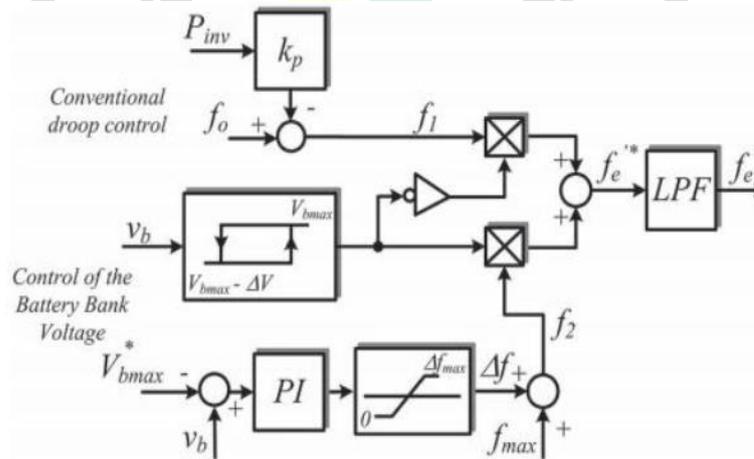


Fig.10. Block Diagram of the Frequency Control at the GFC

A. Implementation of the Proposed Strategy in the GFC

The control of the battery bank voltage, in order to ensure its integrity, was implemented as shown in Fig. 10. While the output of the hysteresis loop is zero, the value of the frequency reference is  $f_e^* = f_1$ . On the other hand, while the output of the hysteresis loop is one, a proportional and integral (PI) controller is used to regulate the terminal voltage of the battery bank equal or below its maximum allowed value ( $V_{bmax}$ ).

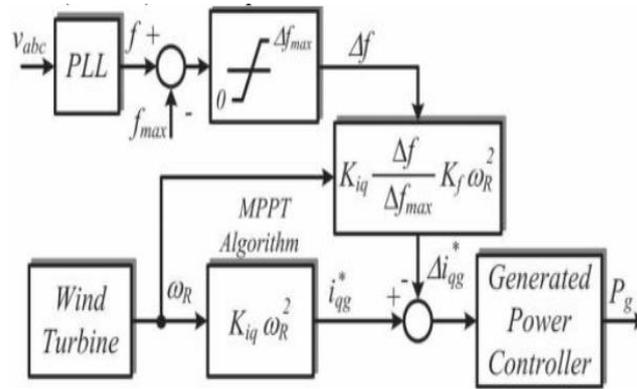


Fig.11. Block Diagram of the Power Control at the GSC

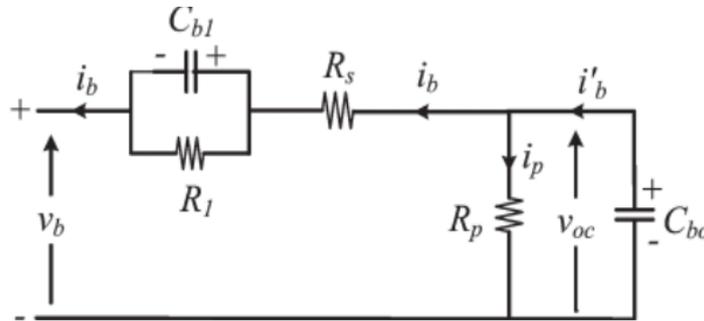


Fig.12. Lead– Acid Battery Equivalent Circuit

This controller is the increment of frequency ( $\Delta f$ ) that must be added to the value  $f_{max}$  to form the new Microgrid frequency reference value ( $f_e^* = f_2 = f_{max} + \Delta f$ ). The value of  $\Delta f$  is proportional to the amount of power that must be decremented from the generated power in order to control the battery bank terminal voltage. The low-pass filter with a 1-Hz bandwidth shown in Fig. 12 is used to avoid sudden variations in frequency due to the hysteresis loop.

B. Implementation of the Proposed Strategy in the GSC

The lattice recurrence is measured by the GSC and if its esteem is higher than  $f_{max}$ , it implies that the voltage of the battery bank is higher than its greatest permitted esteem. For the specific situation where the sustainable power source is a breeze turbine, the GSC power controller decrements the present reference  $i_q^*$ , initially figured by (7), which is currently ascertained by (10), where  $K_f$  is a constant which serves to coordinate the evaluated energy of the GFC with the appraised energy of the breeze turbine. The block diagram of this control action is presented in Fig. 12.

$$i_q^* = K_{iq} \left( 1 - \frac{\Delta f}{\Delta f_{max}} K_f \right) \omega_R^2$$

As the reference current is now determined by (6), the operating points of the wind turbine-generator set follow the dashed curve indicated by  $T_g$  in Fig. 8. This implies a reduction in the generator torque, which causes a reduction in power that is produced by the wind turbine keeping regulated the terminal voltage of the battery bank.

C. Tuning of the Battery Bank Terminal Voltage Controller

The tuning of the PI controller appeared in Fig. 10 considers the dynamic of the battery bank. One conceivable model for lead– corrosive batteries is appeared in Fig. 12. In this figure,  $v_{oc}$  is the battery open circuit voltage,  $R_s$  is the proportional arrangement interior protection,  $R_l$  and  $C_{b1}$  are utilized to display the over-or under voltage that happens when the battery is charging or releasing,  $R_p$  is the protection due to the regular misfortunes, and  $C_{bo}$  models the battery ability to capacity vitality. Regularly, the common misfortunes happen gradually, so the impact of  $R_p$  can be slighted with the end goal of this work.

VI. INTRODUCTION TO FUZZY LOGIC CONTROLLER

From that point forward, a current sound used to be progressed as per stamp the enchanted living arrangements concerning reality, which are extremely intense yet onetime additionally difficult to stand depicted utilizing conventional techniques. Fluffy acknowledge idea has been broadly matured between the administer area incorporating fractional programming in similarity with dco-dc converter framework. A straightforward diminish rationale government is formed upon through a team concerning rules based in regards to the

ethnic information with respect to framework conduct. Matlab/Simulink recreation mannequin is timbered as per lesson the potential direct about dc-to-dc converter then execution over proposed controllers. Besides, chart of fluffy sound judgment senator be capable give perfect both minor solidness flag and sizeable sign potential general execution at indistinguishable time, similar to no longer feasible together with direct manage procedure. Along these lines, supernatural rationale director has been muscular capacity as per enhance the power in regards to dc-to-dc converters. The basic plan over a fluffy rationale controller is demonstrated inside Fig 5 or comprises more than 4 basic angles sure as: a fuzzification interface, who changes over information among reasonable etymological esteems; leverage base, who comprises of a data substandard with the quintessential semantic definitions or the administration regimen set; a basic leadership rationale which, reproducing a human choice process, derive as far as possible employment out of the learning on the point of confinement rules yet phonetic option definitions; a defuzzification interface as yields non fluffy preclude activity of a guessed fluffy govern work [10].

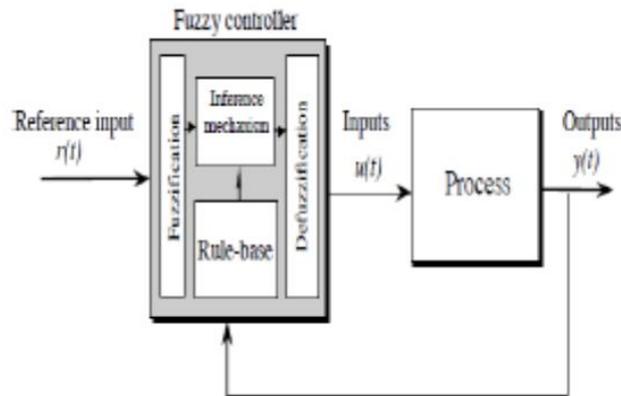


Fig.13. General Structure of the Fuzzy Logic Controller on Closed-Loop System

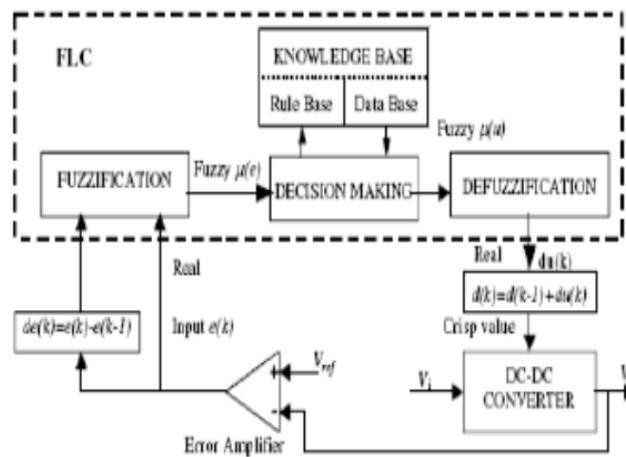


Fig.14. Block Diagram of the Fuzzy Logic Controller (FLC) for Dc-Dc Converters

The fuzzy control systems are based on expert knowledge that converts the human linguistic concepts into an automatic control strategy without any complicated mathematical model [10]. Simulation is performed in buck converter to verify the proposed fuzzy logic controllers.

A. Fuzzy Logic Membership Functions

The dc-dc converter is a nonlinear function of the duty cycle because of the small signal model and its control method was applied to the control of boost converters. Fuzzy controllers do not require an exact mathematical model. Instead, they are designed based on general knowledge of the plant. Fuzzy controllers are designed to adapt to varying operating points. Fuzzy Logic Controller is designed to control the output of boost dc-dc converter using Mamdani style fuzzy inference system. Two input variables, error (e) and change of error (de) are used in this fuzzy logic system. The single output variable (u) is duty cycle of PWM output.

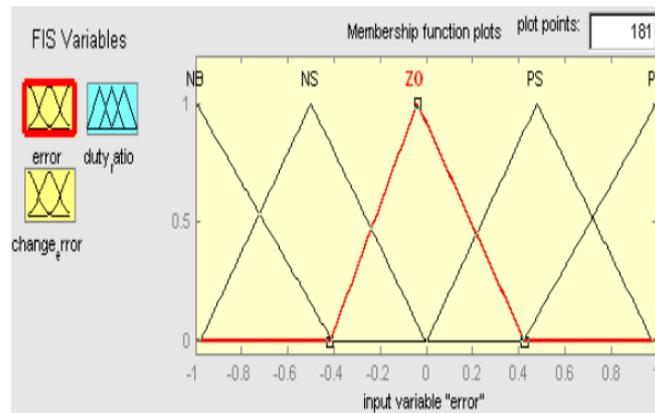


Fig.15. The Membership Function Plots of Error

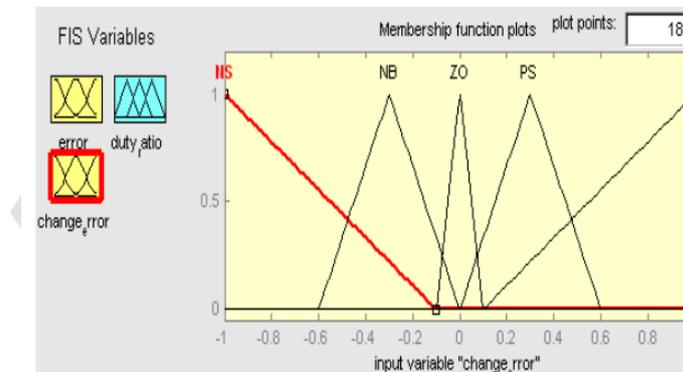


Fig.16. The Membership Function Plots of Change Error

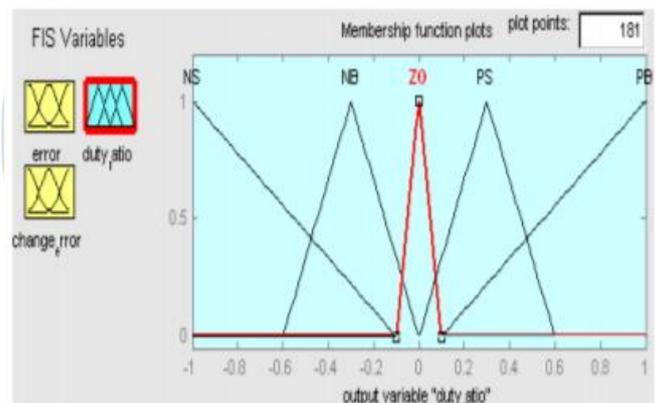


Fig.17. The Membership Function Plots of Duty Ratio

B. Fuzzy Logic Rules The objective of this dissertation is to control the output voltage of the boost converter. The error and change of error of the output voltage will be the inputs of fuzzy logic controller. These 2 inputs are divided into five groups; NB: Negative Big, NS: Negative Small, ZO: Zero Area, PS: Positive small and PB: Positive Big and its parameter [10]. These fuzzy control rules for error and change of error can be referred in the table that is shown in Table I as per below:

TABLE I. Table Rules for Error and Change of Error

(de) \ (e)	NB	NS	ZO	PS	PB
NB	NB	NB	NB	NS	ZO
NS	NB	NB	NS	ZO	PS
ZO	NB	NS	ZO	PS	PB
PS	NS	ZO	PS	PB	PB
PB	ZO	PS	PB	PB	PB

VII. MATLAB/SIMULATION RESULTS

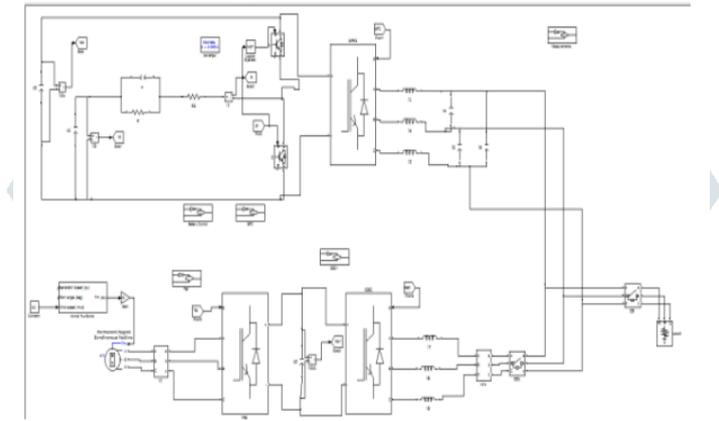


Fig.18. Matlab/Simulation Circuit of Simplified Diagram of the Studied Microgrid

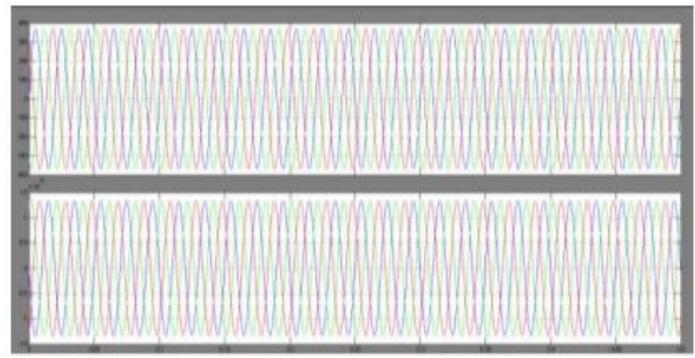


Fig.19. Simulation Wave Form of Grid Voltage and Current



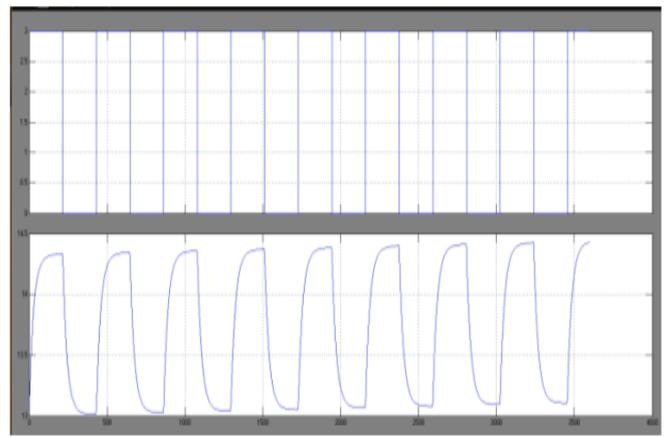



Fig.20. Simulation Wave Form of During the Tests with a 30-Ah 12-V Lead-Acid Battery Current and Voltage

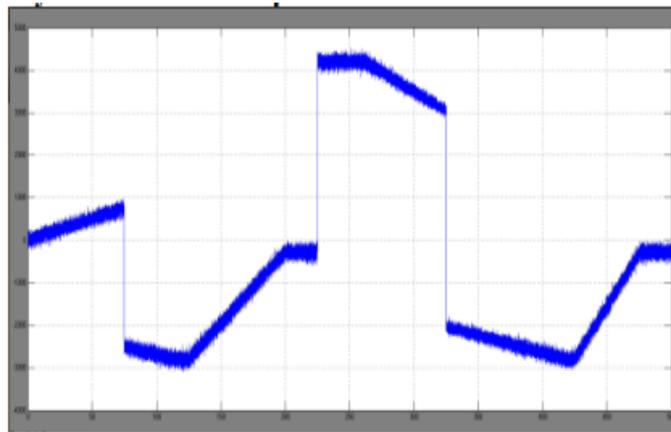


(a)

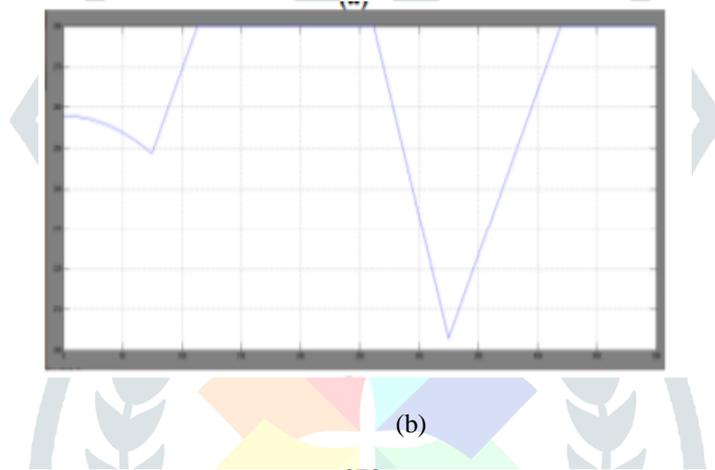

(b)

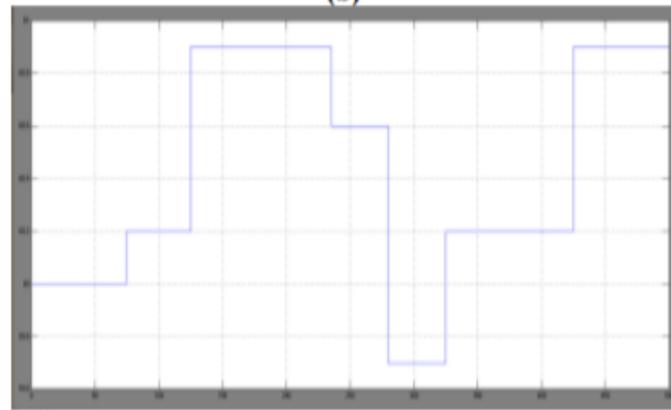



(c)

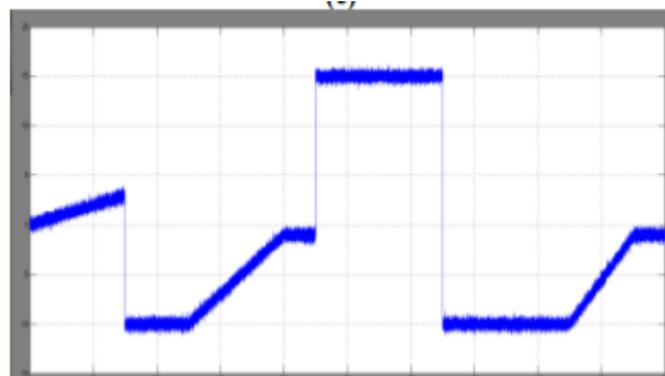

(d)


Fig.21. Simulation Wave Form of Operation with a Constant Wind Speed of 9.2 M/S: (a) Power at the GFC Terminals, (b) Battery Bank Voltage, (c) Microgrid Frequency, and (d) Battery Current

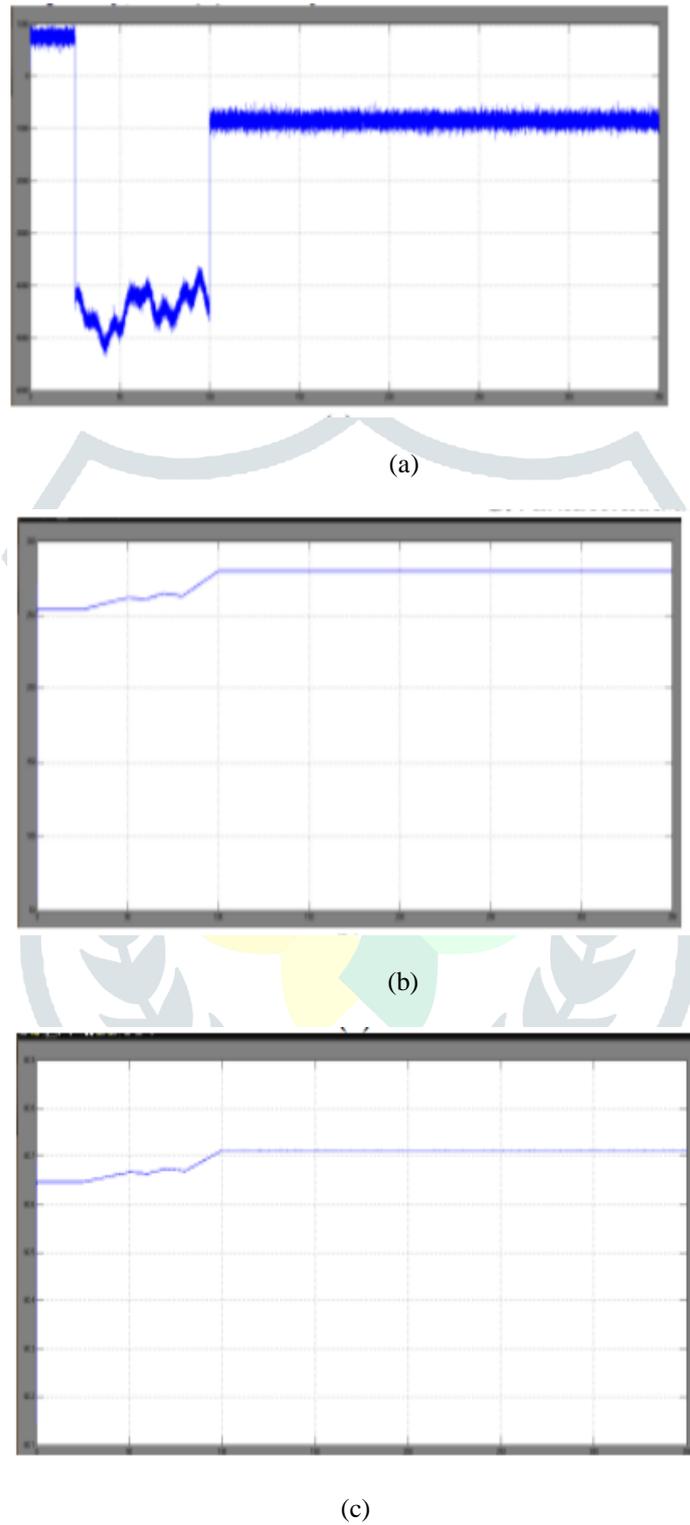

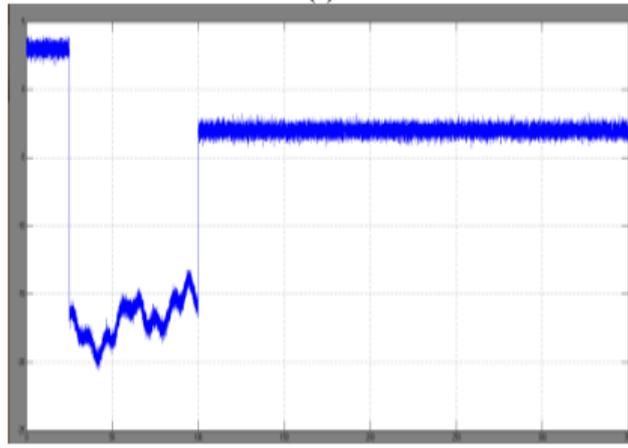


(d)

Fig.22. Simulation Wave Form of Peration with Variable Wind Speed: (a) Power at the GFC Terminals, (b) Battery Bank Voltage, (c) Microgrid Frequency, and (d) Battery Current.

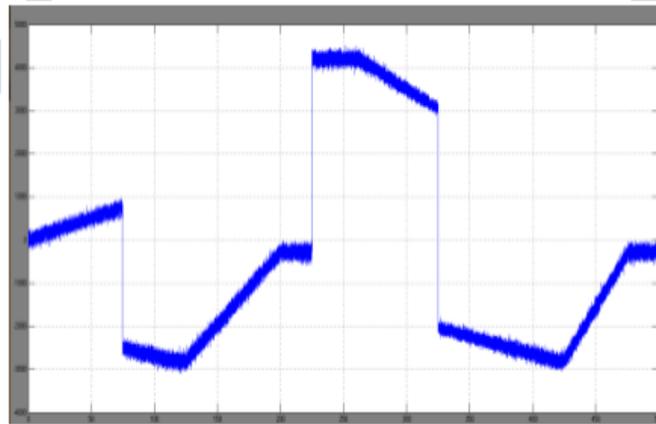

(a)

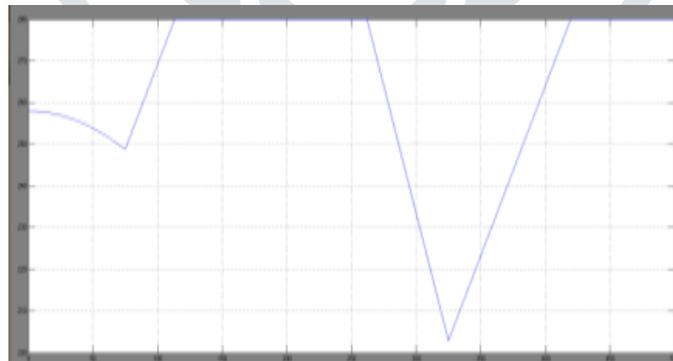

(b)

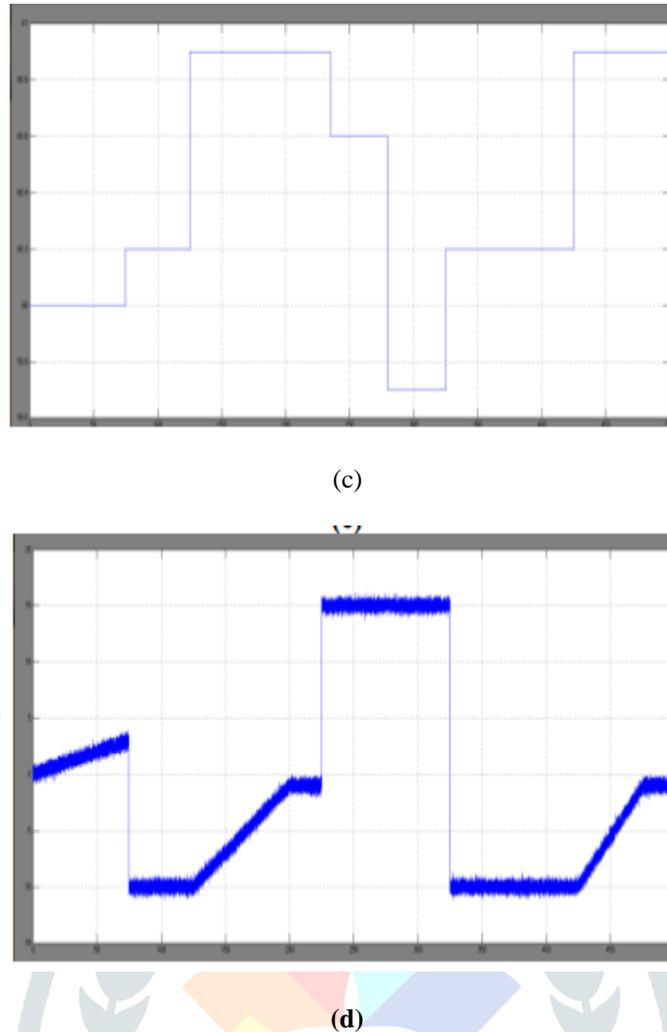


Fig.23. Simulation Wave Form of Operation with Variable Wind Speed with Fuzzy Controller: (a) Power at the GFC Terminals, (b) Battery Bank Voltage, (c) Microgrid Frequency, and (d) Battery Current

## VIII. CONCLUSION

This paper proposed controller is a procedure to fluffly rationale control the created control so as to monitor the charging voltage battery banks in remain solitary Microgrid with conveyed sustainable power sources. This system does not require wired correspondence between the conveyed sustainable sources nor dump burdens to scatter the excess of created control in the Microgrid. These specialized favorable circumstances make the proposed technique a promising instrument to build the reasonability and unwavering quality of the inexhaustible power age framework introduced in secluded and remote groups. In spite of the fact that a breeze turbine has been utilized to exhibit the legitimacy of the proposed methodology, it is additionally substantial paying little mind to the power source existing in the confined Microgrid. The proposed methodology computes the measure of energy that must be created at each time by each source with a specific end goal to keep the adjust of vitality into the Microgrid. At the end of the day, the total of the created, expended, and put away vitality should dependably be zero constantly

## REFERENCES

- [1] José G. de Matos, Member, IEEE, Felipe S. F. e Silva, Student Member, IEEE, and Luiz A. de S. Ribeiro, Member, IEEE, "Power Control in AC Isolated Micro grids With Renewable Energy Sources and Energy Storage Systems" IEEE Transactions On Industrial Electronics, Vol. 62, No. 6, June 2015.
- [2] L. A. de S. Ribeiro, O. R. Saavedra, S. L. de Lima, and J. G. de Matos, "Isolated micro-grid with renewable hybrid generation: The case of Lençóisiland," IEEE Trans. Sustain. Energy, vol. 2, no. 1, pp. 1-11, Jan. 2011.
- [3] L. A. de S. Ribeiro, O. R. Saavedra, S. L. de Lima, and J. G. de Matos, "Making isolated renewable energy systems more reliable," Renew. Energy, vol. 45, pp. 221-231, Sep. 2012.
- [4] J. G. de Matos, L. A. de S. Ribeiro, and E. C. Gomes, "Power control in ac autonomous and isolated micro grids with renewable energy sources and energy storage systems," in Proc. IEEE IECON, 2013, pp. 1827-1832.

- [5] N. Mendis, K. M. Muttaqi, S. Pereira, and M. N. Uddin, "A novel control strategy for stand-alone operation of a wind dominated RAPS system," in Proc. IEEE IAS Annu. Meeting, 2011, pp. 1-8.
- [6] J. Chen, J. Cheng, C. Gong, and X. Deng, "Energy management and power control for a stand-alone wind energy conversion system," in Proc. IEEE IECON, 2012, pp. 989-994.
- [7] M. J. Erickson and R. H. Lasseter, "Integration of battery storage element in a CERTS Microgrid," in Proc. IEEE ECCE, 2010, pp. 2570-2577.
- [8] J. Rocabert, J. A. Luna, F. Blaabjerg, and P. Rodríguez, "Control of power converters in ac microgrids," IEEE Trans. Power Electron., vol. 27, no. 11, pp. 4734-4749, Nov. 2012.
- [9] C. Jin, P. Wang, J. Xiao, Y. Tang, and F. H. Choo, "Implementation of hierarchical control in dc microgrids," IEEE Trans. Ind. Electron., vol. 61, no. 8, pp. 4032-4042, Feb. 2014.
- [10] X. Lu, K. Sun, J. M. Guerrero, J. C. Vasquez, and L. Huang, "State-of charge balance using adaptive droop control for distributed energy storage systems in dc Microgrid applications," IEEE Trans. Ind. Electron., vol. 61, no. 6, pp. 2804-2815, Jun. 2014.
- [11] M. A. Abusara, J. M. Guerrero, and S. M. Sharkh, "Lineinteractive UPS for microgrids," IEEE Trans. Ind. Electron., vol. 61, no. 3, pp. 1292-1300, Mar. 2014.
- [12] J. M. Guerrero, P. X. Loh, T.-L. Lee, and M. Chandorkar, "Advanced control architectures for intelligent micro grids" Part II: Power quality, energy storage, ac/dc microgrids," IEEE Trans. Ind. Electron., vol. 60, no. 4, pp. 1263-1270, Apr. 2013.
- [13] Z. Chen, J. M. Guerrero, and F. Blaabjerg, "A review of the state of art of power electronics for wind turbines," IEEE Trans. Power Electron., vol. 24, no. 8, pp. 1859-1875, Aug. 2009.

