

STUDY OF METHODS USED FOR CAPACITY ESTIMATION ON TWO LANE UNDIVIDED NATIONAL HIGHWAYS

¹Vijay B G

¹Assistant Professor, Civil department.

¹MVJCE, Bangalore,

¹Visvesvaraya Technological University

²Dr. Rajendra Khatawkar

²Professor and Head of civil department.

²JNNCE, Shimogga,

²Visvesvaraya Technological University

Abstract: In these days the traffic is expanding quickly and the activity conditions on Indian roads are exceedingly heterogeneous in nature because of variety of vehicles with various static and dynamic qualities. Due to unrestricted movements all fast and slow moving vehicles without any separation, the roads will face severe congestion and lower speeds. The greater part of national and state highways in India are two lane undivided roadway. These two lane highways achieve its greatest limit soon and require consistent up gradation to do this we need to estimate capacity of selected roads. In this present paper, attempts have been made to collect traffic volume for whole 7 days at national highways such as NH-206 & NH-209. Also tried to compute PCU values at selected stretches on highways by using those values attempts has been made to estimate capacity and to compare those values with the regression equation values. Finally from the present study we got ADT at different section on highways, calculated PCU values as per Chandra's method at various sections on highways and got marginal difference with the values recommended by IRC. It is found that with the increase in lane width, speed and radius substantially caused increased in PCU value. Also we developed linear regression equations to estimate capacity and compared those values with the values as we got using Chandra's method. In most of the cases the error is observed to be less than 3%. The percentage error is in the range between 0.02 and 2.41 which is very marginal. Finally from the study it has been observed that increase in lane width and radius at curves obviously increases the capacity their by increases both comfort and safety of the road users.

Keywords: Traffic volume count, PCU, mean speed, Capacity, Linear regression equation

INTRODUCTION

India has the second largest road network in the world (3.3million km). Current affair of the Indian highways total length is 55,000 km in that which 66% of roads are two lane facilities with varying lane width but still India is facing enormous difficulties in providing better vehicular traffic flow and operations. The main source of transportation in India is by road. Rapid and continuous increase population is major problem for highway engineers. Due to increase in population the different modes of transportation are increases in cities which are resulted in jammed traffic condition on road. Roads play an important role in the transportation of goods and passengers for short medium distances and road transport is more flexible than other modes of transport. But now a day the traffic conditions on Indian roads are highly heterogonous in nature due to variety of vehicles with different static and dynamic characteristics.

Expectation and learning of capacity are essential in the design, planning, operation, and design of road geometrics. Among different things, these give the premise to deciding the lane width and number of lanes to be provided anytime in a road connects concerning the volume and creation of movement. They are profitable apparatuses for the assessment of the ventures. Separated from different parameters, limit is significantly impacted by roadway also, driver conditions. Roadway variables may incorporate the majority of the geometric parameters depicting the highway including the sort of office, lane width, lateral clearance, and width of shoulders also horizontal and vertical alignment of the road. Lane and shoulder widths can substantially affect on mixed traffic movement. On limit lanes, vehicles set out nearer to each other horizontally. This may lessen their speed or increment the longitudinal gaps. The capacity is decreases in both situations.

The present study was undertaken to identify the effect of lane width, average spot speed of different vehicles and standard projected area of different vehicles on the capacity of a two- lane road under heterogeneous traffic conditions. Data were collected at different sections of two lane highways (NH-206 & NH-209) with the carriageway width ranging from 7.0 to 9.8m by considering both straight as well as horizontal curve portions.

Objectives

- 1) Collection of traffic volume for 12hours whole week at straight and curved sections of two lane undivided national highways (NH-209 and NH-206).


- 2) Collecting geometric details of different categories of roads and finding out dynamic (average spot speed) and Static (standard rectangular area) behavior of vehicles.
- 3) Determination of PCU values at different sections of roads and comparing these values with lane width, spot speed and horizontal curve radius.
- 4) Capacity estimation by using Chandra's method and development of regression equations and their comparative statement.

LITRERATURE REVIEW

For estimation of capacity there are many extensive researches were found and literature review are listed

Dr. Satish Chandra and Upendra Kumar⁽¹⁾ (2003) in their paper "Effect of lane width on capacity under mixed traffic conditions in India" showed the relationship between PCU and capacity values by change in carriageway width. By using this relationship a derived the adjustment factors for sub standard lane widths and the results are compared with literature. **A R Khanorkar et.al**,⁽²⁾ (2014) in their paper "Impact of lane width of road on Passenger Car Unit capacity under mix traffic condition in cities on congested highways" found out PCU values at different sections on highways and concluded in such a way that PCU values of vehicles significantly changes with change in traffic volume and width of roadway. **Hemanth M Kamplimath**⁽³⁾ (2013) in his paper "Capacity estimation for A two lane undivided carriageway-A case study for national highway -63" explains the complete process of capacity estimation of and also he suggested the year at which the road may reach its maximum capacity. Their by we may know prioritization in the upgradation of highways. **Dr. Tom V Mathew**⁽⁴⁾ (IIT Bombay) in his paper "Measurement at a point" explains the procedure about various types of volume counts and counting techniques. Along with this to brief inside into various methods of calculating passenger car unit has been provided. Finally he concluded, Chandra's method is the only method that can be applied to the Indian conditions of heterogeneous traffic. **Kay Fitzpatrick et.al**,⁽⁵⁾ in their paper "Summary of comparison of crashes on Rural Two-Lane and Four-lane highways" in texas offers the variation of capacity parameters. **Farouki and Nixon**⁽⁶⁾ (1976) concentrated on "The impact of the carriageway width" explained the speed and capacity varies according to road width. **Amr Shalkamy et.al**,⁽⁷⁾ (2015) in their paper "Influence of carriageway width and horizontal curve radius on PCU values of Two lane undivided Rural roads" studied the influence of different geometric features of tangent and curved elements of PCU values on 2-lane two way rural roads. PCU values for estimated using the speed -area method. Using regression analysis, different models were developed to model the influence of different geometric features on PCU values.

METHODOLOGY

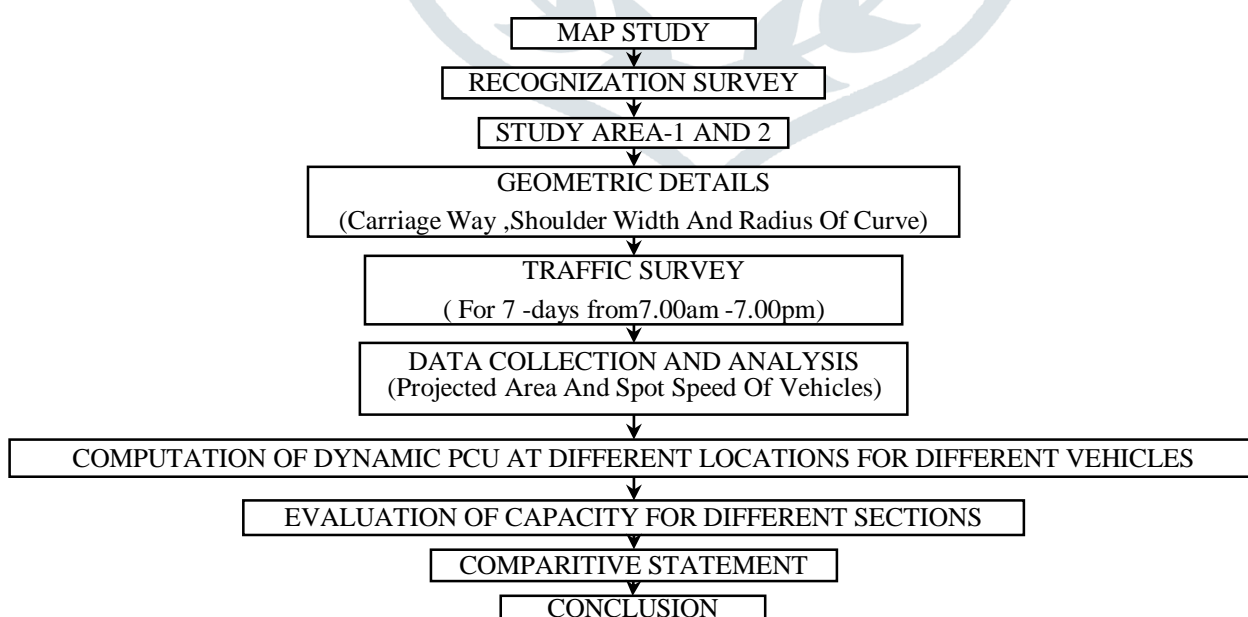

Study Location: The area of location is selected between Bangaluru –Kollegal and Tumkur –Tipatur national highways. The study of location and details of map is show in Figure below. In this study, the various parameters related to capacity effects, have been evaluated on two different national highways (NH206 and NH209) at different sections of Roads. The **NH-209** starts from **Bengaluru** (Kanakpura exit main road) to **Tamil Nadu** border (Dindigul bypass) of distance 486km and **NH-206** starts from **Tumkur** (Tumkur – Honnavara bypass) to **Honnavaara** of distance 363km.

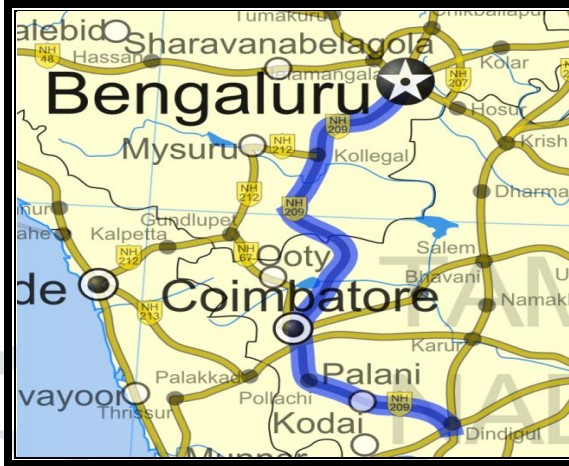


Fig-1 NH-206 (Tumkur to Honnavara)

Fig-2 NH-209 (Bengaluru to Tamil Nadu)

Field data Collection: The physical data is collected manually at selected highways NH209 and NH-206 at 12 different sections (6 sections at Curve and 6 Sections at Straight portion). The details of the carriageway width, type of shoulders and width of shoulders are collected from the field. The different sections were selected for capacity estimation.

The details of study stretches are show in below table-1:

SL. NO	Type and number of lanes	Portion	Category of road	Sections	Carriageway width (m)	Radius (m)	Type of shoulder	Shoulder width (m)	
1	Undivided (2- Lane)	Curve	NH209	Section –I	7.4	87	Earthen	4.1	
2				Section –II	7.6	91	Earthen	3.9	
3				Section –III	7.2	87	Earthen	3.0	
4				NH206	Section –IV	9.8	102	Earthen	2.3
5					Section – V	9.2	95	Earthen	2.4
6					Section –VI	8.0	91	Earthen	3.2
7	Undivided (2- Lane)	Straight	NH209	Section – I	7.2	-	Earthen	3.8	
8				Section – II	7.4	-	Earthen	3.5	
9				Section – III	7.0	-	Earthen	2.8	
10			NH206	Section – IV	9.6	-	Earthen	2.0	
11				Section – V	9.0	-	Earthen	2.1	
12				Section –VI	7.8	-	Earthen	2.6	

Table-1 Geometric details of different stretches

Estimation of Passenger Car Unit: The British practice were generally to express capacity in the different types of vehicles suggest different degree of interference to the other traffic and it is required to take all types to a common unit called as passenger Car Unit(PCU).

To estimate the PCU values is that it is directly proportional to the proportion of clearing speed of vehicle, and inversely proportional to the space occupancy ratio of vehicle with respect to the standard area of vehicle, i.e. a car,. The PCU of a vehicle can be determined using the formula given by Dr. Satish Chandra and Kumar.

$$PCU = \frac{V_c/V_i}{A_c/A_i}$$

Where,

PCU = Passenger Car Unit value of ith type vehicle

V_c = speed of car (kmph)

V_i = speed of ith type of vehicle (kmph)

A_c = static (projected rectangular area) area of a car (m²)

A_i = static (projected rectangular area) area of a ith type of vehicle (m²)

The PCU values for different category of vehicles were calculated at different sections of highways. This calculated value shows the difference in PCU for different category of vehicles with path width at different section. The PCU factor is based on the mean speed values of different vehicle classes

Category	Vehicle	Dimension		Projected area (m ²)
		Length (m)	Width (m)	
CAR	CAR, JEEP, VAN	3.72	1.44	5.39
BUS	BUS	10.10	2.43	24.74
TRUCK	TRUCK	7.50	2.35	17.62
LCV	MINI BUS/TRUCK	6.10	2.10	12.81
M TRUCK	MULTI AXLE TRUCK	2.36	12.0	28.60
BIKES	SCOOTER, MOTORBIKE	1.87	0.64	1.20
AUTO	AUTO, TEMPO	3.20	1.40	4.48
CYCLE	PEDAL CYCLE	1.90	0.45	0.85

Table-2 Vehicle categories and Projected Area

RESULTS AND DISCUSSIONS

The manual Traffic volume count is done for 12 hours (7.00am to 7.00pm) at Six different sections and 7 days traffic is converted into average daily traffic (ADT) by considering both the direction. Hourly variations for the sections are as shown below:

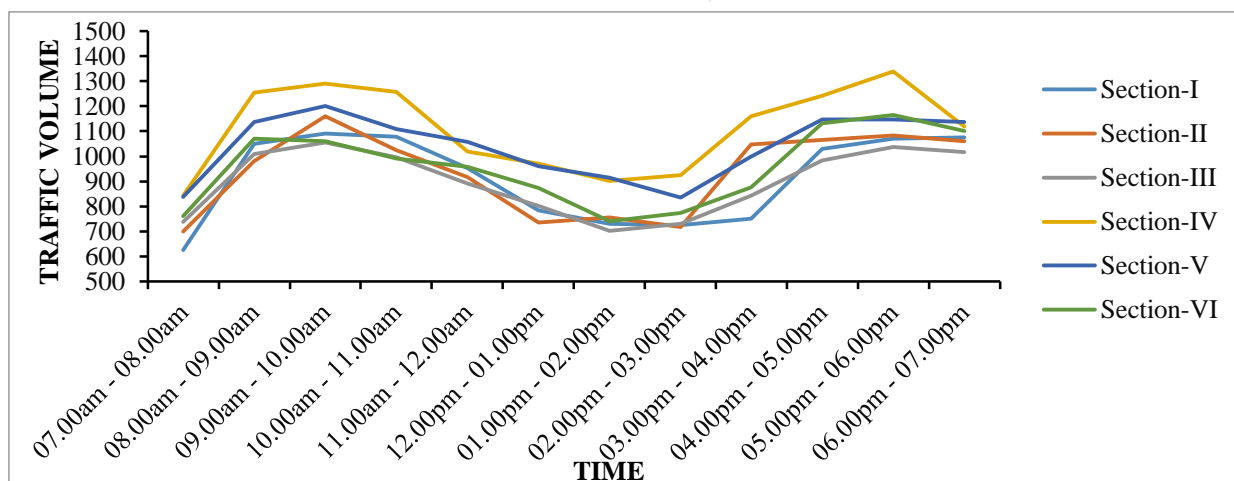


Fig-3 Hourly traffic volume variation at all sections

The percentage composition of vehicles by considering average 7 days traffic on NH-206 and NH-209 which is as shown in figure below:

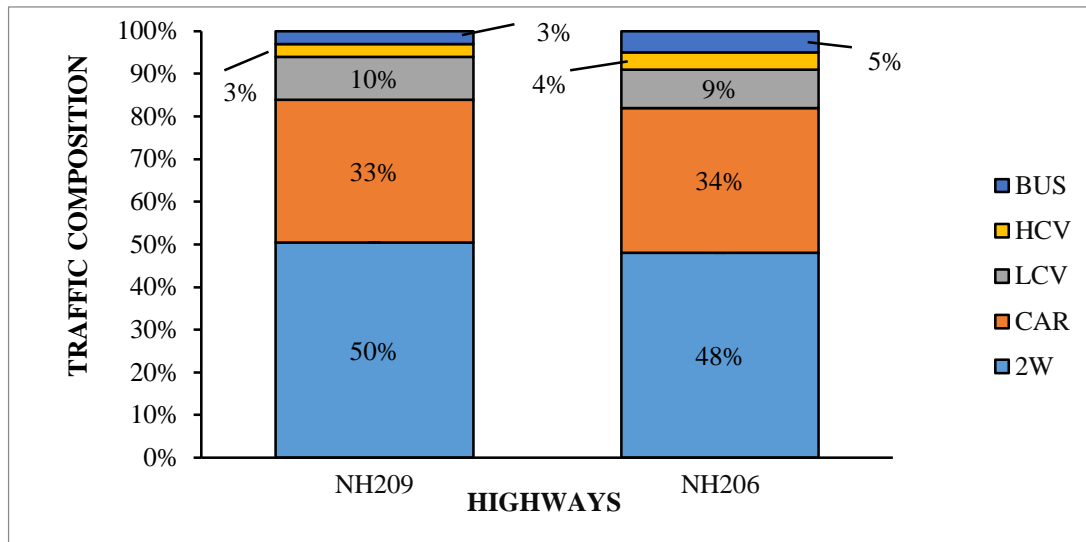


Fig-4 Percentage shares of different types of vehicles on highways

After seven days of volume count the average percentage sharing of vehicles on both the national highways in the total volume shows majority of two wheeler’s i.e. 50%, followed by 33% of cars , 10% of LCV, 3% of Buses and 3% of HCV’s as indicated.

Speed is the most important characteristics of traffic for determination of PCU and capacity. The average speed of all vehicles at different sections is determined. The variation of speed by change in lane width and radius at curves are shown below and it is found to be varying as the lane width increases as well as radius at the curved portions.

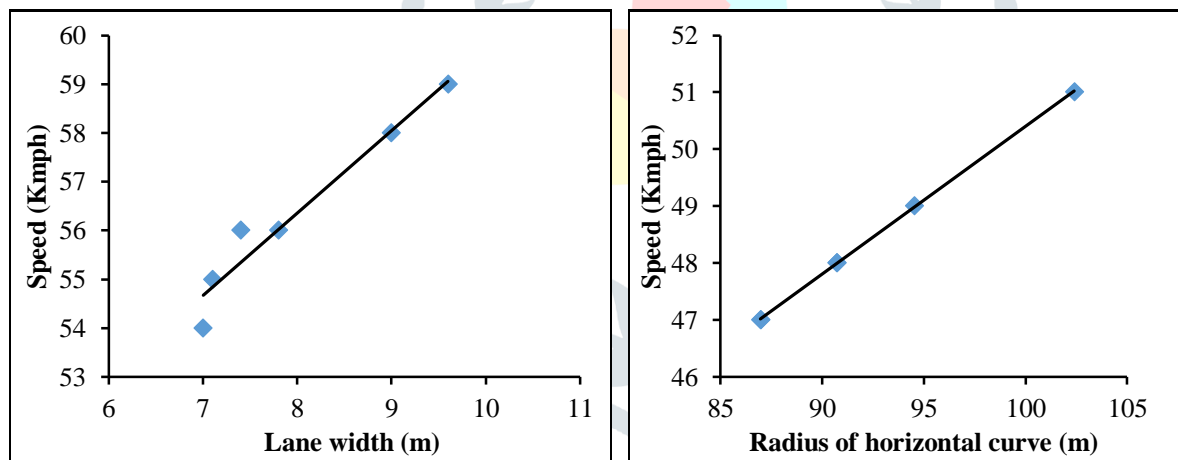


Fig-5 Speed Vs Lane width and Radius of horizontal curve

After getting the average speed value of vehicles PCU can be determined.

EX: PCU of Bus, $PCU = \frac{56/47}{5.34/24.74} = 5.52$

Similarly calculation of PCU for other vehicles by same procedure has been done.

The variation of PCU Values of different category of vehicles by change in lane width, average speed (for straight and curved portion) and radius of horizontal curve are as shown below:

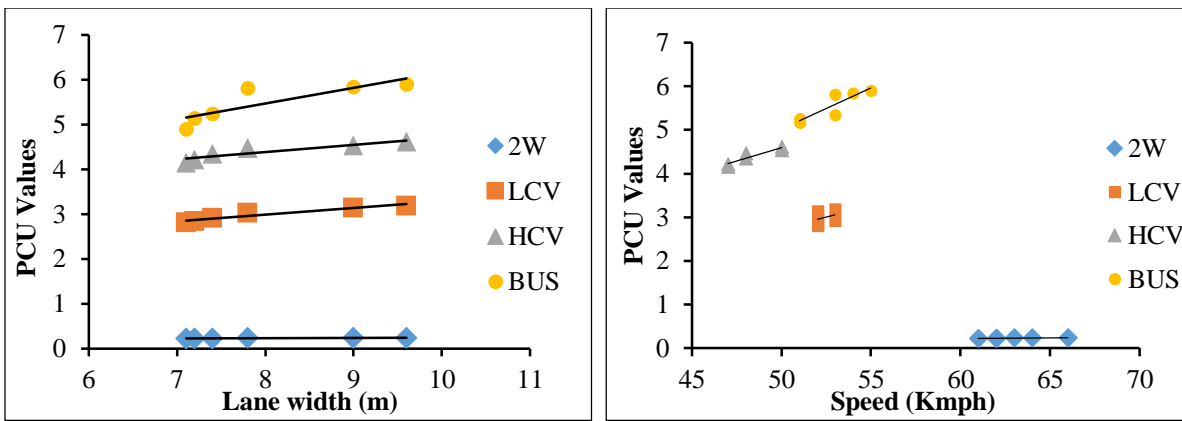


Fig-6 PCU Values Vs Lane Width and Speed at Straight Portion

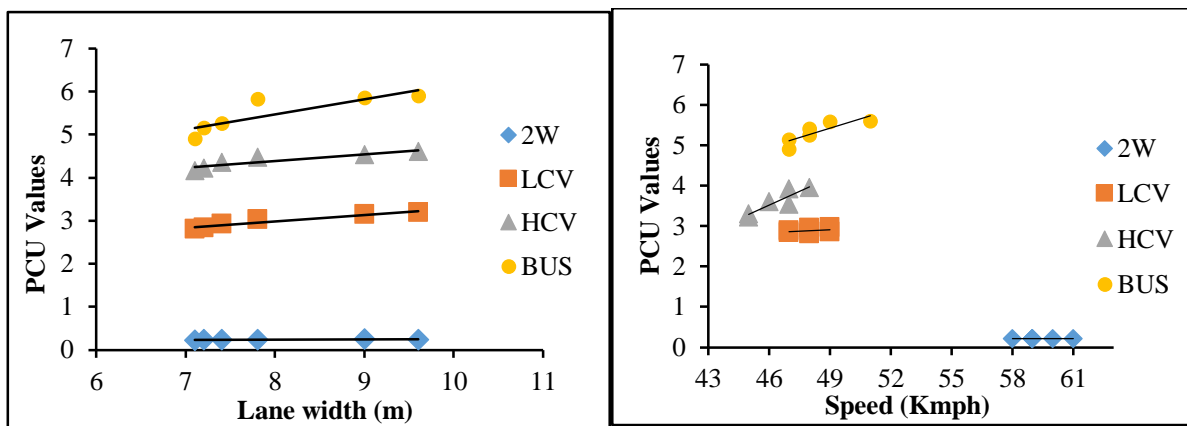


Fig-7 PCU values Vs Lane width and Speed at horizontal curve portion

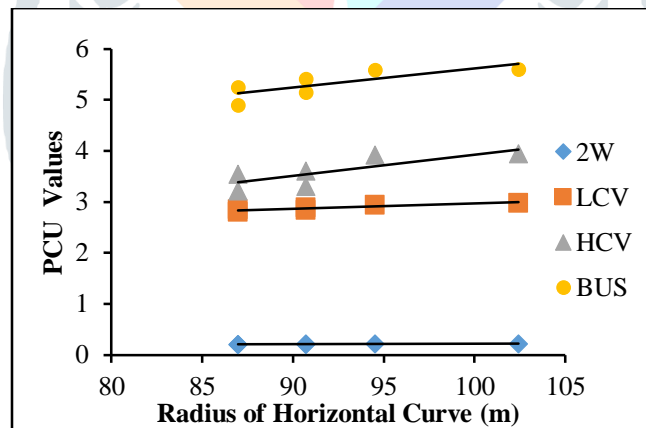


Fig-8 PCU values Vs Radius at horizontal curve portion

PCU values for different types of vehicles at different sections on highways (NH-209 and NH-206) were found out as per Satish Chandra’s method and is observed values are varying depending upon lane width, speed, and radius of horizontal curve.

Capacity estimation:

Attempts have been made to develop linear regression equation to obtain capacity for two lanes undivided national highways based on lane widths, speed and radius of horizontal curves individually. The equations obtained are as follows:

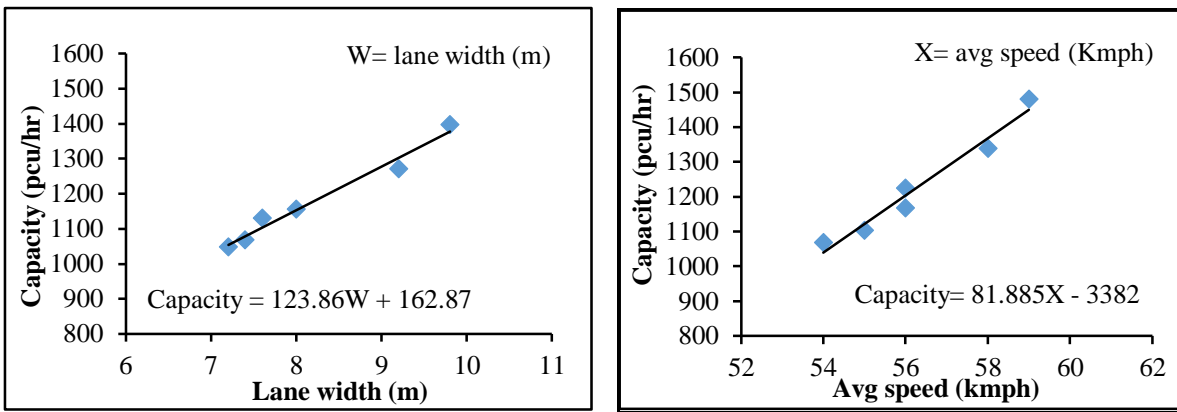


Fig-9 Capacity Vs Lane width and average speed at straight portion

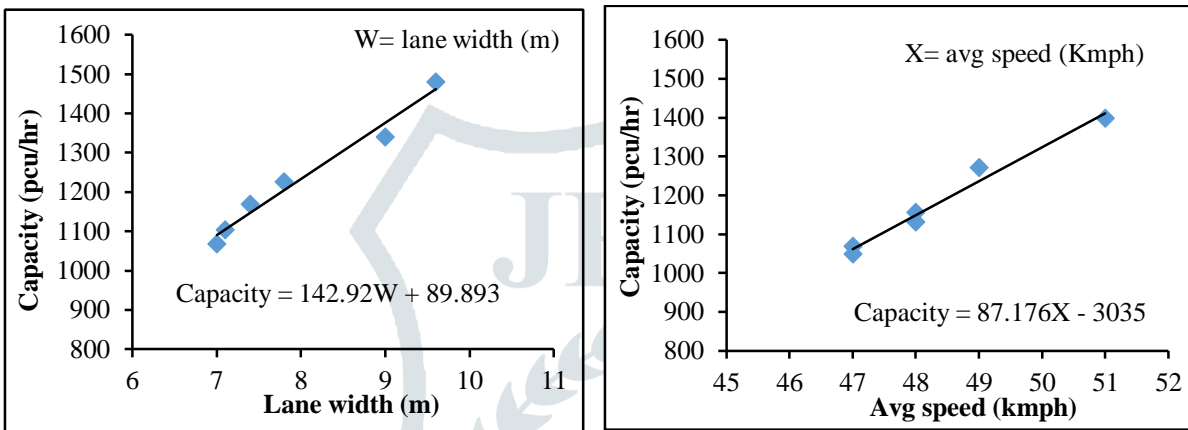


Fig-10 Capacity Vs Lane width and average speed at horizontal curve portion

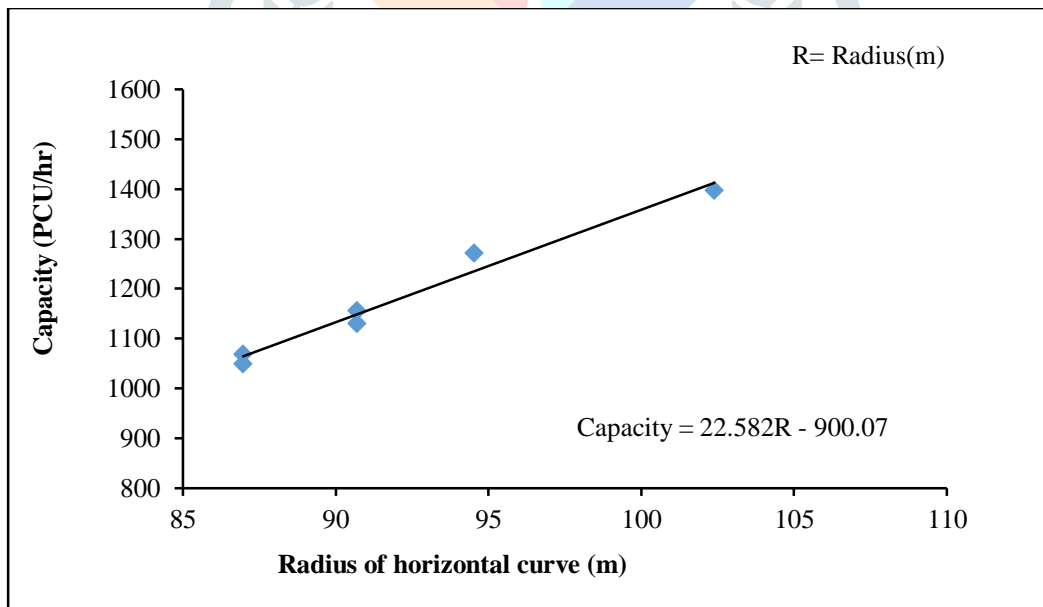


Fig-11 Capacity Vs Radius at horizontal curve portion

The equations obtained are as follows:

- Capacity (based on lane width) at curved portion = **142.92(Lane width) + 89.893**
- Capacity (based on lane width) at straight portion = **123.86(Lane width) + 162.87**
- Capacity (based on Average speed) at curved portion = **87.176(Avg speed) - 3035**
- Capacity (based on Average speed) at straight portion = **81.885(Avg speed) - 3382**
- Capacity (based on horizontal curve radius) = **22.582(Radius of curve) - 900.07**

The capacity obtained from Satish Chandra method and capacity obtained from linear regression equation has been compared and the variation is found to be very marginal as the maximum difference is 2.41% as shown below:

Portion	Category of road	Section	Carriageway width (m)	Capacity (PCU/hr)		% Difference of Chandra and Linear Regression method	Avg speed (Kmph)
				Chandra method	Linear Regression		
Straight	NH209	I	7.1	1103	1105	0.15	55
		II	7.2	1168	1148	1.79	56
		III	7.1	1068	1090	2.05	54
	NH206	IV	9.6	1480	1462	1.24	59
		V	9.0	1340	1376	0.03	58
		VI	7.8	1226	1205	1.77	56
Horizontal curve	NH209	I	7.4	1068	1075	1.06	47
		II	7.6	1130	1104	2.34	48
		III	7.2	1049	1055	0.54	47
	NH206	IV	9.8	1397	1377	1.47	51
		V	9.2	1271	1302	2.41	49
		VI	8.0	1156	1154	0.20	48

Table-3 Capacity of road with different lane width

CONCLUSIONS

Based on field observations and analysis carried out on both the national highways following conclusions are drawn:

- 1) Collected geometric details and compared the width of carriageway, shoulder and its conditions as it may affects capacity of a road.
- 2) The calculated PCU values as per Chandra's method at various sections on highways may have marginal difference with the values recommended by IRC and we considered these values to estimate capacity.
- 3) It is found that with the increase in lane width, speed and radius of horizontal curve, PCU value also got increased.
- 4) Attempts has been made to develop linear regression equation and compared with the capacity values as we got using Chandra's method. In most of the cases the error is observed to be less than 3%. The percentage error is in the range between 0.02 and 2.41 which is very marginal.
- 5) It has been observed that increase in lane width and radius of curves obviously increases the capacity their by increases both comfort and safety of the road users.

SCOPE OF FUTURE WORK

- 1) Attempts may be taken to calculate PCU values and capacity by considering effect of shoulder width, roughness, gradients, intersections, driver behavior (physical and psychological) etc.
- 2) Development of models to estimate capacity at different sections of roads by considering more number of national highways.

REFERENCES

- [1] Satish Chandra and Upendra Kumar (2003) "Effect of lane width on Capacity under Mixed Traffic Condition in India" From ascelibrary.org, DOI: 10.1061/~ASCE! 0733-947X~2003! 129:2~155!
- [2] A R Khanorkar, S D Ghodmare, Dr B V Khode (2014) "Impact of Lane Width of Road on Passenger Car Unit Capacity under Mix Traffic Condition in cities on Congested Highways" ISSN: 2248-9622, Vol-4, Issue 5(version 2), pp.180-184, www.ijera.com
- [3] Hemanth M Kamplimath (2016) "Capacity estimation for a two lane undivided carriageway – A case study for national Highway -63", may 15 2016, ISBN: 978-81-932074-8-2 (ICSTM-16), IIC New Delhi, www.Conferenceworld.in
- [4] Dr. Tom V Mathew (IIT Bombay -2014) "Estimation of point" Transportation systems engineering
- [5] Kay Fitzpatrick, William H. Schneider IV, and Eun Sug Park "Summary of comparison of crashes on Rural Two-Lane and Four-Lane Highways" <http://tti.tamu.edu/documents/o-4618-1.pdf>
- [6] Farouki and Nixon (1976) "The effect of width of suburban roads on the mean free speeds of car", Traffic engineering. Control, Vol.17 (12), PP. 518-519
- [7] Amr Shalkamy, Dalia Said, Laila Radwan (2015) " Influence of Carriageway width and Horizontal curve Radius on passenger car unit values of two lane two way rural roads" Vol -7, No3, ISSN 2224- 5790, Civil and Environmental Research, www.iiste.org
- [8] Yagar and Aerede (1983) "Geometric and Environmental Effects on speeds of 2-lane highways", Transportation research-A, vol.17A, no. 4, pp. 315-325
- [9] Tara gin and Eckhart (1953) "The effect of shoulder on speed and lateral placement of motor vehicles", HB Proceedings, Vol.32, PP. 371-82.
- [10] Pothula sanyasi Naidu, Gundu Navya, Chukka Deepika, Mahesh Yamala, (2015), "Capacity of Road with Vehicle Characteristics and Road Geometries Interface Modelling", International Journal of Civil Engineering, 10 october 2015, PP 27-33.
- [11] YANG Xiao-bao, ZHANG ning (2007), "Effects of number of lanes on Highway Capacity", International conference of management science and engineering, August 2007, PP 351-356.
- [12] Satish Chandra (2015), "Highway Capacity Reserch on Inter Urban Highway in India", Spring International publication, July 2015 PP 20-24.
- [13] Nitish Sharma, Shriniwas Shrikant Arkatkar and Ashoke Kumar Sarkar (2011), "Study on Heterogenous Traffic Flow Characteristics of a Two Lane Road", Taylor and Francis Group, July 2011, PP 185-196.
- [14] Akash Rajkumar Wadhwa, Dattatray Shinde (2017), "A Study of Flow Characteristics of National Highway", International Journal of Innovations in Engineering Reserch and Technology, April 2017, PP 62-67.
- [15] Prema Somanathan Praveen, Venkatachalam Thamizh Arasan, (2012), "Influence of Traffic mix on PCU Value of Vehicles Under Heterogeneous Traffic Conditions", International journal for Traffic and Transport Engineering, IIT Madras, October/may 2013, PP. 302-330.
- [16] Tara gin and Eckhart (1953) "The effect of shoulder on speed and lateral placement of motor vehicles", HB Proceedings, Vol.32, PP. 371-82.
- [17] Chandra, S. and Kumar, U. (2003), " Effect of lane width on capacity under mixed traffic conditions in India" Journal of Transportation Engineering, ASCE, Vol.129, No.2, pp.155-160.