

RFID based system for prevention of material mix-up at various stages in Metal-Injection-Molding process.

¹Vaidehi,²Pratijnya,³Sandhya, ⁴Priyanka

¹Assistant Professor,² Assistant Professor,³ Assistant Professor, ⁴ Assistant Professor

¹Electronics and Communication

¹KLSGIT, Belagavi,India

Abstract: Feedstock preparation for Metal Injection Molding (MIM) is a very crucial step since deficiencies in quality of the feedstock cannot be corrected by subsequent processing adjustments. Hence, it is important that the quality of feedstock is homogeneous. At present the complete identification process of raw material at various stages is manual which leads to the creeping in of errors in the form of wrong identification of powders. There is no fool proof method to check these errors. These errors are of very high magnitude and cause huge financial loss. Hence, an attempt is made to prevent mix-up and provide fool proof tracking and tagging using RFID at various stages of compounding and molding.

IndexTerms: identification, tags, RFID, tracking, material mix up, MIM.

I.INTRODUCTION TO METAL INJECTION MOLDING PROCESS

Metal Injection Molding or MIM (also referred to as Powder Injection Molding or PIM) is a net-shape process for producing solid metal parts that combines the design freedom of plastic injection molding with material properties near that of wrought metals. With its inherent design flexibility, MIM is capable of producing an almost limitless array of geometries in many different alloys.

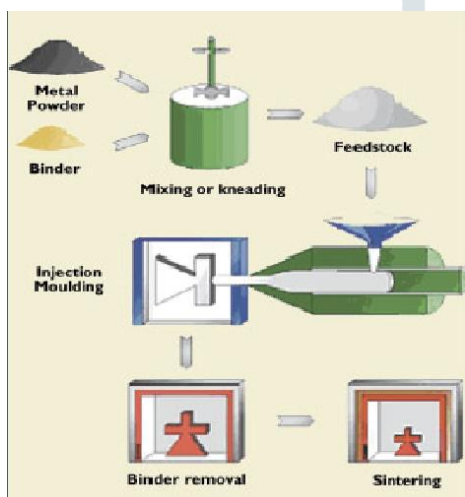


Fig:

The main production steps of the metal injection molding process are:

1.1 Feedstock Preparation also called as compounding:

The feedstock is mixed from fine metal powder, typically <22 micrometers, and a binder. The latter can be based on water, wax or other system. Different feed stocks will have specific characteristics like viscosity, injection pressure and temperature, and debinding process. The powder loading is 55-65% by volume or 90% by weight for steels. The mixing of powders and binders is done in a Turbula mixer and then through a Planetary mixer.

1.2 Injection of feedstock in mold machine:

Molding is done in a conventional injection molding machine. The mold is designed similar to that for plastic but with allowances made for shrinkage and the cooling requirements for a feedstock highly loaded with metal particles. Molding can be done on both vertical and horizontal machines.

II. Debind the part to remove major portion of binder.

The parts are removed from the mold. At this point they are called “green” parts. Before the part can be sintered, the bulk of the binder has to be removed. The debinded part is called “brown”.

III. Sinter in vacuum or controlled atmosphere furnace:

The brown part is placed on a ceramic tray and processed in a high temperature furnace. Sinters in a high vacuum batch furnace or a continuous hydrogen furnace. Sintering temperatures go up to 2500° F.

IV. Finishing operations as needed.

Machining, grinding or lapping may be desirable to produce tighter dimensional tolerances or to add certain features which are not economical or feasible in the tooling. Some examples are threads inside holes, reamed holes or ground surfaces to create tighter tolerances on outside diameters or flat areas.

Background:

Different uses of RFID were reported in recent years in the manufacturing industry. Ford Motor has successfully implemented a just-in-time (JIT) manufacturing model at its facility in Cuautitlan, Mexico. In manual coding system, the identification sheets were manually updated at every stage in the production line. In RFID based systems, however, updates are automatically written on the tag as the vehicle advances on the production line without the risk of operator error [1]. The work of Gavin Chappell, David Durdan et al [2] titled “**The Value of Auto-ID in Retail Stores**”, highlighted the benefits of using Auto-ID technology in retailing - to streamline operations, resulting in reduced labor requirements for receiving, stocking, locating inventory, conducting inventories and checkout. Reduce consumer wait times at checkouts.

For pharmaceutical manufacturers and distributors, RFID will also be helpful to more easily and rapidly conduct drug recalls, manage inventory, and identify theft and/or diverted shipments. RFID technology is clearly superior to any other competing alternative. The potential consequences of not applying this technology are too large. [3] RFID reader and back-end database both help to automatically record and store the circulation history and current status of a tracked object, and they cooperate to synchronize the information flow and material flow. A solution of material tracking information system was proposed, that integrates RFID readers, database and application. [4] **Ken Congdon**, in his work titled “**Enhance Inventory Management with RFID**” [5] focused on enhancing inventory visibility and cutting costs by using a closed-loop RFID solution to track parts in its manufacturing plant.

The present work aims at developing RFID systems architect to prevent the material mix-up and provide fool-proof tracking and tagging system. An attempt is made to prevent the material mix up at the feedstock preparation, mix preparation and also at the time of delivery of material to the correct molding machine and check whether the RFID system works in the above case to prevent material mix up at various stages of compounding and molding

V. RFID:

Radio frequency identification technology, known as RFID, has been described as “tech’s official Next Big Thing”. RFID is not actually a new technology, but it is being applied in new ways, spurred by technological advances and decreased costs. Once used during World War II to identify friendly aircraft, RFID is now being used in a variety of public and private sector settings, from hospitals to the highway.

RFID proponents believe that the ability of these systems to deliver precise and accurate data about tagged items will improve efficiency and bring other benefits to businesses and consumers alike. Some applications have however raised privacy concerns. In RFID systems, an item is tagged with a tiny silicon chip and an antenna; the chip plus antenna (together called a “tag”) can then be scanned by mobile or stationary readers, using radio waves (the “RF”). The chip can be encoded with a unique identifier, allowing tagged items to be individually identified by a reader (the “ID”).

5.1 How RFID Works

RFID wirelessly exchanges information between a tagged object and a reader/writer. An RFID system is comprised of the following components (Figure)

1. One or more tags (also called transponders), which consist of a semiconductor chip and antenna.
2. One or more read/write devices (also called interrogators or simply, readers).
3. Two or more antennas, one or two on the tag and at least one on each read/write device
4. Application software and a host computer system.

Tags are usually applied to items, often as part of an adhesive bar-code label. Tags can also be included in more durable enclosures and in ID cards or wristbands. Readers can be unattended standalone units (such as for monitoring a dock door or conveyor line), integrated with a mobile computer for handheld or forklift use or incorporated into bar-code printers. The reader sends a radio signal that is received by all tags present in the RF field tuned to that frequency. Tags receive the signal via their antennas and respond by transmitting their stored data. The tag can hold many types of data, including a serial number, configuration instructions, activity history (e.g., date of last maintenance, when the tag passed a specific location, etc.), or even temperature and other data provided by sensors. The reader receives the tag signal via its antenna, decodes it and transfers the data to the computer system through a cable or wireless connection.

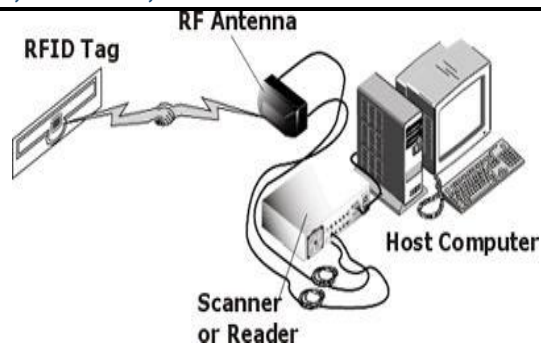


Figure : RFID System components

5.2 Design and Implementation:

To prevent wrong material being taken for preparation of feedstock at compounding stage. To prevent excess quantity addition and wrong powders/binders to be weighed without any sequence and prevent operator errors. There by preventing the initial mix up and also control the excess addition of material for the given feedstock. To track the material through a series of process like mixing in dry mixer, planetary mixer and then through the cooling table and granulator by which the material can be tracked by the operator at any point of time through the network connections. Prevent the mix-up at mix preparation area, by identifying right virgin material and right regrind material is used for mix preparation, and also control the excess addition of material for the given mix Provide wrong destination alert and delivering the material to the correct molding machine.

Assumptions made:

The raw material, i.e., the metal powders and binders are unloaded from the truck and tagged (RFID) before being stored in the storage area. The crates which are used to move the metal powders from one workstation to another are permanently tagged using active tags. Initially the tags contain no information other than the tags unique id. Color coded crates/bins are used for different elemental based compounds.

Problems Identified:

In the second step of material flow i.e., Compounding, following problems were identified:

In the process of weighing there are chances that the material which is to be taken for weighing may be different from the one that is to be taken for weighing. There is no confirmation whether the material that is added to the container, is correct or not.

In planetary mixing stage, i.e., the third sub step of the compounding process, the problem lies in the tracking of the material. There is no way to check what type of material is being processed in the mixer. Only the operator has to remember and keep in his memory. As far as he remembers the details there will be no problem, but always there exists a chance of human error i.e. the loss of memory. It becomes difficult to track the material and process involved in tracking back the material is time consuming

In the sub step of cooling, granulation and extrusion, the problem is tracking of the material; there is no way to check what type of material is being cooled on cooling table, granulated in the granulator and processed in the twin screw extruder.

The third step of material flow is mix preparation, where the problem identified is as follows:

There is no confirmation about the virgin material and regrind material taken for mix preparations are correct and are according to the check list. Sometimes a different regrind material is mixed with that of virgin or vice-a-versa. Also there is no confirmation about the weighing in a definite ratio. In some cases the tag (manual tagging) which is present on the bin goes missing and becomes difficult to identify the material.

In the last step which is molding, the problem identified is explained below.

One of the major causes for material mix-up is in delivering of the material to wrong molding machine or a wrong material delivered to the molding machine. This is an operator error which cannot be prevented by manual method. The only way to know that the material delivered to the molding machine was incorrect is at the time of debinding or sintering stage. The part is finally scrapped making huge process loss and financial loss to the company

Proposed solution:

RF Solution to weighing: The weighing machine is synchronized with the computer with the help of RS232 port along with a RFID reader and writer. In the process when the material is brought near the weighing area, the tag on it will be scanned for the correctness of the material with help of RFID reader, if the material brought is correct then the weighing machine will display the reading otherwise there will be no display on the weighing machine, and a display on the computer screen shows that this is not the material and gives a command prompt to get the right material to the weighing machine.

PREVENTION OF MATERIAL MIX-UP WITH RFID at compounding stage

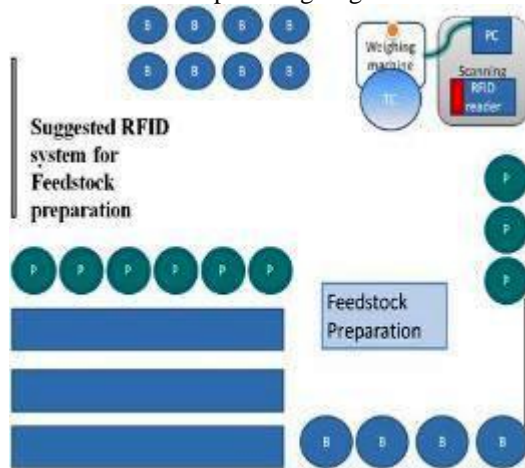


Fig 3: Feedstock preparation area with RF solution

P – Powder B – Binder TC – Turbula container

VI. RF Solution to planetary mixer:

With the help of RFID tags the material can be tracked through individual machines by fixing a RF tag to the machine itself. So when the material is fed into the mixer the tag information on the container is read first and the information is then transferred to the tag provided on the machine; hence at any point of time if the operator wants to know what material is being processed in a particular machine he can use the RF reader and get the information at ease.

6.1 RF Solution to Cooling, granulation and twin screw extrusion:

With the help of RFID tags the material can be tracked through on cooling table and granulator machine by fixing a RF tag to the machine and cooling table and the extruder. So when the material is loaded onto the cooling table; tag information on the planetary mixer is read first and the information is then transferred to tag on cooling table and then when the material is cooled and transferred to the granulator, the information on the tag on cooling table is read first and then information is transferred to the tag on granulator and then transferred on to the tag fixed on the bin or crate where the granulated material is collected.

Tag information on the bin is read first and the information is then transferred to tag on twin screw extruder and then the material is palletized and collected into the same bin, again the information from the twin screw extruder is transferred on to the tag on the bin.

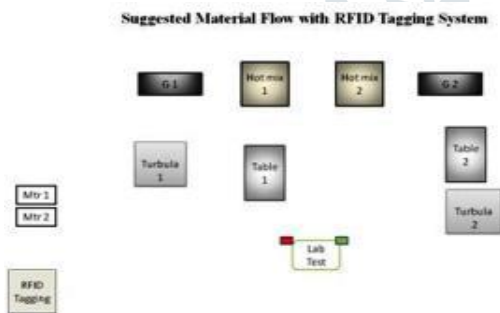


Fig 4: Turbula mixing, planetary mixing, granulation and tagging

TURBULA 1, 2 – DRY MIXER HOT MIX 1, 2 – PLANETARY MIXER G1, G2 – GRANULATOR; TABLE 1, 2 – COOLING TABLES

RF Solution to Mix preparation:

According to the requirement from the molding department the mixes are prepared and delivered to the molding machines. A mix sheet is generated in the mixing area through ERP and according to it the mixes are prepared.

A mix bin is kept on the weighing machine and then with the help of RF reader the information on the tag available on virgin material bin is read, if it matches with the mix sheet in the computer database then it allows for weighing and adding the material to the mix bin. And the same is practiced for the regrind bin. After the confirmation is done then the information from the virgin material and the regrind material is transferred on to the tag on mix bin and then is sent for V-cone mixing.

When the mix material is sent for V-cone mixing, the tag information on the bin is read first and the information is then transferred to tag on V-cone mixer and then the material is mixed and collected into the same bin, again the information from the V-cone mixer is transferred on to the tag on the bin.

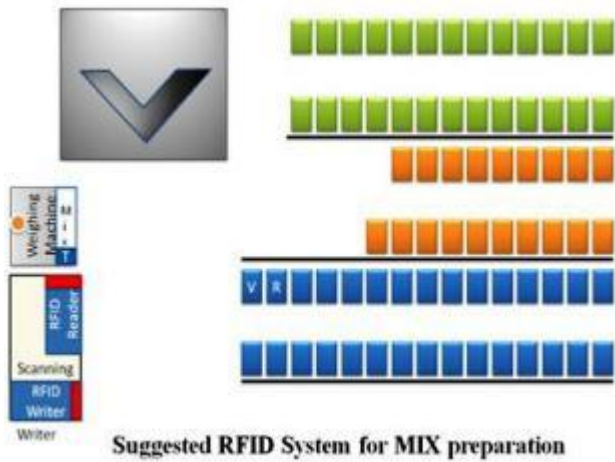


Fig 5: V-cone mixing, mix preparation, and storage

V – VIRGIN MATERIAL
 R – REGRIND MATERIAL
 MIX – VIRGIN+REGRIND
 COLOUR CODE:
 BLUE – IRON BASE COMPOUNDS
 ORANGE – ELEMENTAL BASE COMPOUNDS
 GREEN – STEEL BASE COMPOUNDS

RF Solution to Molding:

With the help of RFID system a material can be delivered to the correct destination. At the entrance of the molding department a computer and a RFID reader/writer is provided, the material running in each of the molding machines is fed into the ERP software. All the molding machines are provided with a flash light or a rotating light atop each and are connected to the output of the computer. Now when the material from the compounding is brought in molding department the RF reader will scan the tag and through logic controllers compares with the molding machine running with the same material and gives an output signal to that machine which is running with the same material, the operator visualizes the flash light and delivers the material to that molding machine thus preventing wrong delivering of the material to the machine.

Alternate RF Solution: the above method is an cost effective method, if the cost is not the issue then; for each and every molding machine a reader/writer is provided and when the material is brought near the molding machine, the reader scans the tag on the bin, if it matches with the material running in the machine then the machine will accept it otherwise the machine itself will stop functioning. When the regrind material has to be taken back that time the writer takes the information from the material delivered to it and transfers the information onto the regrind bin.

Other issues that can be overcome by RFID system like the writing of tag, In the present practice the tag is written manually which results in errors. One of them is the hand writing issue one operator writes the tag but the other operator may or may not understand the handwriting, also a parallax effect is a major concern for example the powder CBA-FNIAA has to be written but due to continuous writing of tags he may write something different like CBA-FNIAD. To overcome these problems, RFID tags are best use for these purpose were in all the data is fed automatically and no human can occur.

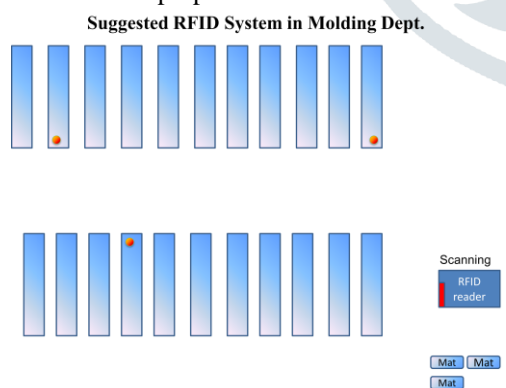


Fig 6: Molding machines
 MAT – MATERIAL FROM COMPOUNDING, VERTICAL BLUE BARS – MOLDING MACHINES

SCOPE FOR FUTURE WORK

The scope for future work may include the use of RFID system integrated in the organization for:
 Tracking the parts at different stages of manufacturing process
 Logistics to sub contractors required for finishing operations
 Packaging and shipments to various customers.

VII. RESULTS AND DISCUSSION**Results of Descriptive Statics of Study Variables**

On the basis of experimental / trial run using RFID system in the present manufacturing process we can prevent material mix up at:

1. At the raw material storage area the material can be tagged and kept, whenever information is required it can be read through the RF reader at ease.
2. At the weighing area for the feedstock preparation, right quantity and right powders and binders will be weighed in sequence without any operator errors. There by preventing the initial mix up and also control the excess addition of material for the given feedstock preparation.
3. At the time of mixing in dry mixer, planetary mixer and then through the cooling table, granulator the material can be tracked and can be checked by the management committee through the network connections.
4. At the time of mix preparation right virgin material and right regrind material will be identified by the RF reader, thereby preventing the mix up at mixing stage, and also control the excess addition of material for the given mix
5. At the time of delivering the material to the correct molding machine, The RFID system ensures that the correct material is being delivered to the right molding machine.

REFERENCES

- [1] D.Johnson “RFID tags improve tracking, quality on Ford line in Mexico” *Control Engineering* 49(11), 2002, pp.16
- [2] Gavin Chappell, David Durdan, Greg Gilbert, Lyle Ginsburg, Jeff Smith, Joseph Tobolski, “The Value of Auto-ID Technology in Retail Stores”, *Auto-id center Massachusetts institute of technology*, Published February 1, 2003.
- [3] VivekBapat and Glenn Restivo, “Reaping the long term benefits of integrating RFID into pharmaceutical manufacturing”, *Pharmaceutical engineering* May/June 2005.
- [4] Zhang Min, Li Wenfeng, Wang Zhongyun, LI Bin, Ran Xia, “A RFID-based Material Tracking Information System” *Proceedings of the IEEE International Conference on Automation and Logistics*, August 18 - 21, 2007, Jinan, China
- [5] Ken Congdon, “Enhance Inventory Management with RFID”, *Integrated Solutions*, September 2008