

PERFORMANCE EVALUATION OF HYBRID FILTER FOR IMAGE RESTORATION

Isra Rasool¹, Akhilesh Bhardwaj²

¹M.Tech Student,

²Assistant Professor,

Department of Computer Science and Engineering,

Shri Krishan Institute of Engineering and Technology, Kurukshetra, Haryana.

ABSTRACT

Image process could be a methodology to convert a picture into digital type and perform some operations on that, so as to induce an enhanced image or to extract some helpful data from it. Noise in image- Noise in image is introduced due to many reasons like atmospheric disturbances, focus of the image etc. Image Restoration includes processes that decide to take away degradations/noise and restore the initial image. Restoration is distinguished from improvement in this degradation is thought as an external influence that's become distinguished image signal. There are different filtering techniques that are to be applied on image to make an image noise free. But such filtering techniques are not enough to remove the noise from the image because one filter is not sufficient, thus we propose combination of hybrid filters in this paper that are required to make an image noise free. Performance evaluation of proposed filter is measured on the basis of MSE and PSNR.

Keywords: Digital Image Processing, Accommodative Fuzzy Mean, Cloud Model, Peak Signal to Noise Ratio, Mean Square Error

1. INTRODUCTION

Image processing means that deals with varied actions to alter a picture. DIP could be a part of signal process wherever process of digital pictures exploitation varied sorts of computer algorithm. This algorithm is often changed in order that to conjointly modification the looks (colour, size) of the digital image simply and quickly. Digital Image process has varied applications in varied studies and researches of science and technology [1]. Pictures square measure made to record or show helpful info or details. Due to flaws within the imaging and capturing method, however, the recorded image forever represents a degraded version of the initial scene [2]. Mainly Image process system contains pictures as two dimensional signals whereas applying already set signal process strategies to them. Image process essentially includes the subsequent three steps: import the image with optical scanner or by photography, analysing and manipulating the image which has knowledge compression and image improvement and restoration and output is that the last stage within which result may be altered image or report that's supported image analysis [3].

1.1 What is Image Restoration?

Image Restoration is referred as method to revive a degraded/distorted image to its original content and quality. The main motive of restoration is to boost the standard of a digital image that has been degraded as a result of varied kinds of noise or blur superimposed into it. Once all repairs are created to the copy by using computer software, a brand new print will be created. The ultimate digital photograph file of the repaired photograph will be saved as a repository copy and replaces requirement for a negative [4].

1.2 Image Restoration Process

It deals with raising the looks of a picture. The Image is corrected mistreatment totally different with raising the looks of a picture. The Image is corrected mistreatment totally different correction ways like Median filtering, linear filtering, adjustive Filtering etc. so as to revive a picture to its original forms. Fig 1.1 shows a model of the image restoration [5].

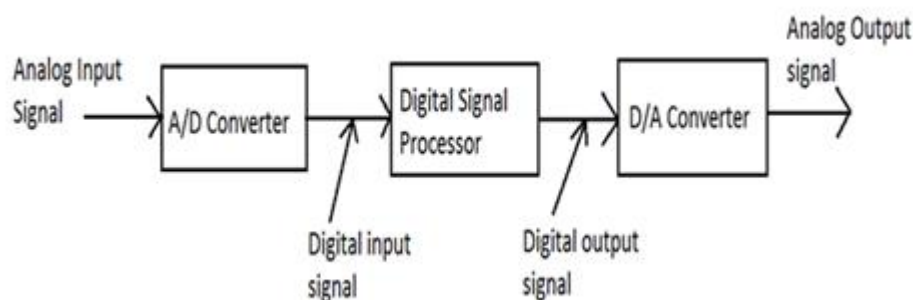


Figure 1.1: Digital Image Processing

1.3 Noise

Image noise is random disparity of brightness or colour information in image. An aspect of electronic noise may be made by the sensing element and circuitry of a scanner. Film grain conjointly up by image noise. Image noise is an undesired by-product of captured image that adds spurious and extraneous information. Image noise is random changes contrast pictures. "Noise" implies that "discarded signal"; unwanted electrical fluctuations in signal received by AM radios caused sounding acoustic noise ("static").

By analogy redundant electrical fluctuations themselves came to be referred to as "noise". Image noise is, of course, inaudible. Photographs corrupted by impulse noise usually occurred in practice. This kind of noise might seem in digital pictures due to channel decoder damages, colouring down of signal in communication links, communication subscriber's moving, video sensor's noises and alternative. The impulse noise known as salt and-pepper causes white and black points appears in digital grey scale pictures, which chaotically scattered along image space. Applying of classic median filter for removal of such kind of noise offers comparatively sensible results, that square measure revealed in restoring of brightness drops, objects edges and native peaks in noise corrupted pictures [6].

1.4 Image Noise Model

Whenever noise is discusses, everybody knows that noises are often introduced within the image, either at the time of image generation (e.g. whenever we use camera and photographic films to capture an image) or at the time of image transmission. Keeping these totally different classes of noise having certain characteristics. Another type of noise that is present throughout the image transmission is Salt-Pepper noise. It seems as black and/or white impulse of the image. Such noises occur usually man-made or environmental noise that seems as impulsive noise. It has following form: where $z(k, j)$ denotes the impulse and $i(k, j)$ denotes the initial image intensity at the pixel (k, j) . As in case of the-CCD cameras, the most type of noise is that the transfer loss noise [7]

1.5 Denoising

In day today times, visual data is usually transmitted within in the form of digital pictures, however the pictures thus obtained are usually corrupted with noise which is undesirable and unwanted component that is intruded within the image at the time of acquisition or transmission from sender to receiver, thereby decreasing the standard of image. The noise might seriously have an effect on the performance of image process techniques. Hence, an economical de-noising technique becomes a really vital issue in image processing[8].De-noising a picture is an elementary task for correcting defects created throughout the acquisition method of a real world scene and its reproduction on display, owing to physical and technological limitations. It can even be helpful as a pre-processing stage so as to boost the results of higher level applications. The process of removing the noise of a picture whereas conserving its main features (edges, textures, colours, contrast, etc.) has been extensively examining the facts over the last two decades and a number of other sorts of approaches are developed [7].

1.7 Filters

Elimination of noise is one amongst the key works to be done in computer vision and image process, as noise results in the error within the image. As any noise within the image are often lead to serious errors. Noise is an undesired signal that is manifested by undesirable data. So the image that gets contaminated by the noise is that the degraded image and using different filters will filter this noise. So filter is a very important system of any signal process system. Thus filters are used for enhancing the image, because it removes undesirable signal elements from the signal of interest. Filters are of various types i.e. linear filters or nonlinear filters [4]

2. RELATED WORK

The research work performed in this field by diverse researchers is presented as follows:

Er. Jyoti Rani (2014) [1] provides introduction of digital image process is delineate. Primarily this paper is expounded to image restoration, differing types of noises are introduced and totally different ways that are accustomed take away noise are delineate. Totally different parameters are delineating to match the results of various ways that are used. All the work is completed on medical pictures. At the tip of paper reference and conclusion is additionally delineate.

Anamika Maurya et. al. (2014) [2] Author offer an elliptical summary of most helpful restoration models .Different types of image restoration techniques such wiener filter, inverse filter, regularised filter, Richardson –Lucy algorithmic rule, neural network approach, wavelet primarily based approach, blind DE convolution are delineated and strength and weakness of every approach are known.

Pooja Kaushik (2012) [3] compared the various image sweetening techniques by victimisation their quality parameters (MSE & PSNR) & planned a replacement erosion sweetening technique. this system provides higher result than alternative techniques and their PSNR price is high & MSE is low. The experimental results show that the planned sweetening technique provides higher results.

Geoffrine Judith.M.C (2011) [4] introduces a brand new call based mostly median filtering rule is conferred for the removal of impulse noise from digital pictures. Here, this paper the impulse noise corrupted pel by the median of the pel scanned in four directions. The signal restoration theme of this filter adapts to the various impulse noise ratios where as deciding Associate in nursing applicable signal trained worker from a reliable neighbourhood. The experimental results of this filter applied on numerous pictures corrupted with the majority ratios of impulse noise favour the filter in terms of judgment and sound judgement than several of the opposite distinguished impulse noise filters.

Chaahatet. al. (2013) [5] introduced "Probabilistic Recovery Filling-In Technique for Image restitution" which is able to notice the corrupted and missing constituents and also the likelihood of recovery on explicit pixel is projected. For corrupted pixels, if likelihood of recovery of constituent is $< hr$ then matching of the constituent from close are going to be done. If recovery likelihood of corrupted constituent is $>60\%$, then matching of the constituent are going to be through with the remaining a part of that specific constituent. For fully missing pixels, finding the missing block method are going to be carried and matching with close is nice possibility during this case. The analysis can offer higher quality of image once recovery.

Gabriela Ghimpeteanu (2016) [6] Author contemplate a picture decomposition model that has a completely unique framework for image denoising. The model computes the parts of the image to be processed in an exceedingly moving frame that encodes its native pure mathematics (directions of gradients and level lines). Then, the strategy authors have a tendency to develop is to denoise the parts of the image within the moving enclose order to preserve its native pure mathematics, which might be a lot of affected if process the image directly. Experiments on full image information tested with many denoising ways show that this framework will offer higher results than denoising the image directly, each in terms of Peak S/N and Structural similarity index metrics.

Charu Khare (2012) [7] present a completely unique approach to method the image mistreatment completely different filtering strategies by Image Restoration. The aim is to reinforce the digital image, reconstruct it into the first kind from the clattering image. This paper is an outline of effective algorithms which will be used for image restoration. For which, techniques square measure used on the premise of nonlinear filters to revive the image. The performance of bar graph accommodative Fuzzy (HAF) filter is fastidiously examined and compared with alternative filters like, Weighted Fuzzy Mean (WFM) filter, Minimum-maximum Detector based mostly (MDB) filter, accommodative Fuzzy Mean (AFMF) filter, Centre Weighted Mean (CWM) filter, and Min-max Exclusive Mean(MMEM) filter on the premise of (Peak Signal to Noise Ration) PSNR. Experimental results on pictures can illustrate the capabilities of all the studied approaches.

Easwara M. (2013) [8] Author uses a detail-preserving filter supported the Cloud Model (CM) to get rid of severe impulse noise. CM is associate degree unsure conversion model, between qualitative and quantitative description that integrates the construct of randomness and opaqueness conventional random range generation technique in traditional cloud generator algorithmic rule overcomes the insufficiency of common technique to get random numbers. It will manufacture random numbers which may be certain and replicated, and this random numbers gift to be a random sequence as a full. The digital options of the conventional cloud characterised by 3 values with the expectation ex , entropy nut and hyper entropy He and area unit ok to represent a standard cloud. First, associate degree uncertainty-based detector, normal cloud generator, recognize the pixels corrupted by impulse noise. Then, the known noise pixels area unit replaced by a fuzzy mean estimation of the processed noise free pixels among the detection window. Compared with the normal change filters, the CM filter makes a good improvement in image denoising. Especially, at high density background level. Thus, the cloud model filter will take away severe impulse noise whereas conserving the image details.

Jyoti Kamboj (2015) [9] an images corrupted by impulse noise are often originated in routine practice. This problem accrue in digital images because of channel decode damages, signals dyeing down during transmission, when transmit in a communication channel, video sensor's noises and other partitions. Before the invention of computers and software such as Photoshop, mostly photo restoration was done by restoration experts such as museum art restorers. These were applied directly to the damaged photo and consisted mainly of air brushing over the damage. A new hybrid filter which is combination of median filter and decision or hybrid filter is proposed for reducing the unwanted noises and provide best quality image. Proposed filter provide best result as compare to other filter.

Ankita (2016) [10] Images corrupted by impulse noise are frequently originated in routine practice. This problem accumulates in digital images because of channel decoded damages, signals dyeing down during transmission, when transmit in a communication channel, noises from video sensor and other partitions. Before the invention of computers and software such as Photoshop, most of the photo restoration was done by restoration experts. These were applied directly to the damaged photo and consisted mainly of air brushing technique over the damage. A new decision based filtering technique which is combination of K-means and PCA is proposed for reducing the unwanted noises and thus provides better quality image. Proposed filter provide better result in comparison to other filtering techniques.

Rajanjot Kaur (2017) [11] Image restoration is an important issue in high level image processing which deals with recovering of an original and sharp image using a degradation and restoration model. During image acquisition process degradation occurs. Image restoration is used to estimate the original image from the degraded data. Aim of this research paper is to provide a concise overview of most useful restoration models. Using the proposed approach the features of the neighboring pixels are calculated and on basis of these features image is restored.

3. PROPOSED WORK

Image quality is a characteristic of an image that measures the supposed image degradation (typically, compared to an ideal or perfect image). Imaging systems may introduce some amounts of distortion or art effects' in the signal, so the quality assessment is an important problem. Image noise is taken into account as undesirable by-product of capturing image. The categories of noises are Gaussian noise, salt and pepper noise, tarnish noise, Brownian noise etc. There are different filtering techniques that are to be applied on image to make an image noise free. But such filtering techniques are not enough to remove the noise from the image because one filter is not sufficient, thus a combination of hybrid filters are required to make an image noise free. A hybrid noise filter which is the combination of two or more filters used for removing the noise from the images is implemented. Performance evaluation of proposed filter is done on the basis of MSE and PSNR. An image is said to be noise free if it has high value of PSNR and low value of MSE.

4. RESULTS AND ANALYSIS



Figure 4.1: Folder containing test images

This folder contains the images on which the filters are applied to calculate the peak signal to noise ratio value.

As the image gets corrupted due to various types of noises, at that time we find PSNR of corrupted image due to noise. To remove various types of noises from corrupted image, we apply hybrid filters technique to remove different types of noises like salt and pepper noise, gaussian noise etc. Now after applying hybrid filter we calculate PSNR of denoising image and then compare PSNR of noising image and PSNR of denoising image.

```
PSNR Of The Noisy Image = 27.473386
Iteration 1 : PSNR = 32.708716
Iteration 2 : PSNR = 33.112017
Iteration 3 : PSNR = 32.832595
Iteration 4 : PSNR = 32.535504
Iteration 5 : PSNR = 32.328222
Iteration 6 : PSNR = 32.160896
Iteration 7 : PSNR = 31.980139
Iteration 8 : PSNR = 31.837961
Iteration 9 : PSNR = 31.719370
3.171937e+01: PSNR =
>> |
```

Figure 4.2: PSNR of Noisy image

There are total 9 iterations takes place which gives different values of PSNR. Average value of PSNR of the image can be calculated by adding all the values of the iterations and divide these values by the total number of iterations.

Here we calculate the average value of the iterations of the image Abc.jpg

$$32.70 + 33.11 + 32.83 + 32.53 + 32.32 + 32.16 + 31.98 + 31.83 + 31.71 / 9 = 291.17 / 9 = 32.25$$





So, the average value of PSNR from the iterations is calculated.









Similarly, we calculate the average value of the PSNR for other image too.





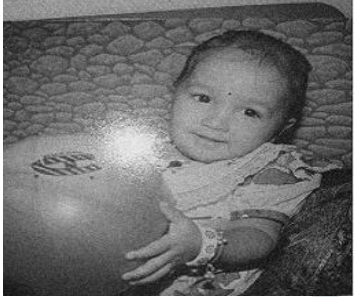



Table 4.1: PSNR of Existing and Hybrid Filter

PSNR of existing filter	PSNR of Hybrid Filter
27.47	32.25
26.98	34.29
27.04	32
27.13	31.13
27.08	29.61
27.02	31.44
27.34	30.39
27.34	30.39
27.32	29.2
27.11	34.3
27.42	33.41

Table 4.2 Comparison between PSNR of noisy image and PSNR of denoisy image

S.No.	Noisy Image	PSNR of Noisy Image	DE noisy Image	PSNR of DE noisy Image
1.		29.5055 67		32.3930 77
2.		29.5057 06		32.2223 6

3.		29.8074 03		32.3060 26
4.		29.4301 47		31.9389 69
5.		29.4993 82		31.9057 56
6.		29.6642 08		32.8161 34

7.		29.7387 86		34.2009 69
8.		29.7803 87		32.0113 11
9.		29.4984 06		31.2125 84
10.		29.9215 36		33.6293 00

5. CONCLUSION

Noise reduction or removal is the actually meaning of filtering, or to increase or fetch a particular set of attributes like edges. Good result on the basis of PSNR value provided by median filter, Hybrid filter removed all the limitation of median filter and it showed better result as compared to median filter. But a proposed filter Hybrid decision filter overcome limitations of both filters and showed best result. The performance of the Decision Based algorithm was tested over a wide variety of 16-bit coloured images of 512×512 size against Median Filter and is found to perform quite well on images corrupted with impulse noise. The PSNR values obtained using different filtering techniques at different levels of impulse noise are calculated. It can be noted that the new hybrid filter produces low MSE and high PSNR when compared to median Filter.

REFERENCES

- [1] Er. Jyoti Rani et.al., " Image Restoration Using Various Methods and Performance Using Various Parameters", Volume 4, Issue 1, January 2014.
- [2] Anamika Maurya, "A Novel Method of Image Restoration by using Different Types of Filtering Techniques", Volume 3, Issue 4, July 2014.
- [3] Pooja Kaushik et al., "Comparison Of Different Image Enhancement Techniques Based Upon Psnr & Mse", International Journal of Applied Engineering Research, ISSN 0973-4562 Vol.7 No.11 (2012).
- [4] Gitam Shikkenawis, "2D Orthogonal Locality Preserving Projection For Image Denoising", IEEE transactions on Image Processing, Vol.25, No.1, January 2016
- [5] Chaahat, " Probabilistic Recovery Filling-in Technique for Image Restoration", Volume 3, Issue 3, March 2013.
- [6] Gabriela Ghimpeteanu, "A Decomposition Framework For Image Denoising Algorithms", IEEE transactions on Image Processing, Vol.25, NO.1, January 2016.
- [7] Charu Khare et. al., " Image Restoration Technique with Non Linear Filter", International Journal of Advanced Science and Technology Vol. 39, February, 2012.
- [8] Easwara.M, " Removal of High Density Impulse Noise Using Cloud Model Filter", Volume 1, Issue 6 (Mar. – Apr. 2013).
- [9] Jyoti Kamboj, "Implementation of Hybrid Median Filter Using Neural Network and Fuzzy Logic", International Journal of Emerging Research in Management & Technology ISSN: 2278-9359 (Volume-4, Issue-5), 2015
- [10] Ankita, "Research Paper on Image Restoration using Decision Based Filtering Techniques", 2016 IJEDR | Volume 4, Issue 3 |
- [11] Rajanjot Kaur, "A Modified Approach for Image Restoration", International Journals of Advanced Research in Computer Science and Software Engineering ISSN: 2277-128X (Volume-7, Issue-7), 2017
- [12] Mohammad Mahmudur Rahman Khan, "Digital Image Restoration in Matlab: A Case Study on Inverse and Wiener Filtering", <https://www.researchgate.net/publication/329275741>, 2018

