

# Approach to Smart Watering System in Tea Gardens

<sup>1</sup>Yashu Pradhan, <sup>2</sup> Dr. Manoj Kumar Deka

<sup>1</sup>Research Scholar, <sup>2</sup>Assistant Professor

Department of Computer Science & Technology

<sup>1</sup>Bodoland University,

Assam, Kokrajhar-783370

**Abstract** — In this paper sufficient discussion has been performed on design and development of smart watering system for tea gardens. The main objective of this approach is reduction on water requirement for nurturing tea plants to minimize the effect on water scarcity on people, society and environment. The challenges to be overcome are listed to give a better perception of the purpose of system in real life. However the methods that can be adopted are explained in detail and an approach is also presented with overall system design. The system components along with their significance are also explained in context of real life conditions.

**Index Terms** — GSM, Smart Watering System, Microcontroller, Sensor, Soil Activity Chart, Transducer.

## I. INTRODUCTION

The scenario of tea estate is comprised of vast area for plantation which requires huge volume of water, a key nutrient, which is also a life sustaining natural resource [1]. Due to application of water in almost every sector of industry and rising level of industrial product consumption worldwide, water is quickly becoming a natural resource of utmost urgency of preservation. In this context implementation of smart watering [2] system in agricultural industry can bring retardation in depletion rate of this priceless life supporting natural resource. The key facts that gets easily ignored in the process of watering that any volume of water supplied to plants beyond requirement takes the form of wastage. Also the method of watering in dry season is different compared to other seasons, but the requirement is not same on each day hence neglecting this fact will result in water wastage. Smart watering system takes close notice of key factors in watering and attempts to analyze soil condition and accordingly nurtures plant with minimum wastage of water. For analysis, the vast area can be divided into smaller units which make Smart Watering System more effective as it supplies only necessary areas without wasting resource on adjacent non-demanding areas. However analysis performed forms a database over a period, which can be developed as soil activity chart, valuable for enhancing agricultural soil quality.

## II. CHALLENGES IN DEVELOPMENT OF SMART WATERING SYSTEM

- 1) Development of most applicable sensor.
- 2) Integrating all the inputs of the applied sensor.
- 3) Minimise the data loss.
- 4) Reliability
- 5) Data logging for future reference.
- 6) Smart energy efficient system.
- 7) Cost effectiveness.
- 8) Robustness and protection against natural phenomenon.

## III. BACKGROUND STUDY

The application scenario of sensor based operation for automation is easily available in process, food packaging, aeronautics and other industries etc. Although the history of sensors and their application is very ancient but yet no full-fledged establishment has been observed when it comes to irrigation sector. The advancement is very narrow and dim, however, in tea industry the work involved in processing the green leaves to tea has comparatively high standard of automation than any other agricultural product. But no significant work of automation has been done for nurturing and caring of tea plants. However a recent research development work in drip irrigation has been done by K. Prathyusha, M. Chaitanya Suman which features; automated platform with PT1000 as temperature sensor and tensiometer as moisture sensor with 16X1 LCD display for monitoring all the present readings of sensors and current status of control valves. In addition to it a chemical injection unit is used to mix required amount of fertilizers, pesticides, and nutrients with water, whenever required; in addition to flow meter for analysis of total water consumed [2]. Another similar work in the field of tea industry at Tocklai tea estate by C-DAC, Kolkata and Tocklai Experimental Station which features; fully automated, real time, round the clock, online wireless field hourly basis data collection system with help of sensors for ambient & soil temperature, soil moisture and pH, solar radiation, CC camera (infra red imaging even in night) for

insect invasion and diseases. Additionally, the system is computer interfaced for enriching database with accurate data; with user friendly online Decision Support System for handling multiple input parameter. [3]

#### IV. METHODOLOGY

In order to minimize water wastage, in process of watering tea plants, it is crucial that amount of water provided to soil is accurately sufficient to its requirement. Therefore the method used in data acquisition from soil should have high standard of accuracy. Moreover soil moisture varies from place to place within the tea estate; hence for system to be effective the reference value of moisture requirement will be based on species of tea plant. And being an automated system, it is required to make fast and accurate decision for execution task of watering. The various individual components of the system need to be assembled and integrated properly for process to be completely functional.

The prioritization of events involved in developing a system is mandatory. Hence for a reliable and convenient approach, the important factors of system to be understood prior to moving in development stage are

##### Sensor and its significance

The entire performance of system is dependent on the reliability and accuracy of signal retrieved by sensor. The readability of fractional differences makes it more accurate in real world. The choice of converting the sensed value into analog or digital form decides the overall design of the system.

##### Signal processing

The chances of wastage can be brought to lowest level when system responds to each individual requirement strictly based on its location. As demand varies with respect to location, system response needs to be reliable accurate to be effective and applicable in real life. This can be accomplished when each request signal is properly addressed and thus the size of division of location will be based on processing technique adopted by developer. It will also affect the decision making of the system.

##### Decision making

The decision making process covers the generation of command signals that will be transmitted to controller; programmed with specific action for all type of situation. For total automation, the decision of watering action taken against requirement, need to provide exact address for watering and time period for watering action. The decision can be made using computer with programmed software platform or programmed microcontroller unit [3][4][5]. It depends on the developer's knowledge, choice and application of the system.


In addition the system can be made more effective when real time feedback from location can be used in decision making process [6]. However for achieving such effectiveness there needs to be a continuous communication between location and control unit.

##### Execution and Control

It is necessary to ensure that decisions made after processing remain true for all cases of requirement hence the reliability of system in real life is governed by the quality of control supported by system. In general the execution task is accomplished with use of machineries like sprinklers designed for spraying water.

##### System Design

The block diagram provided below gives the pictorial representation of information flow and block building components.

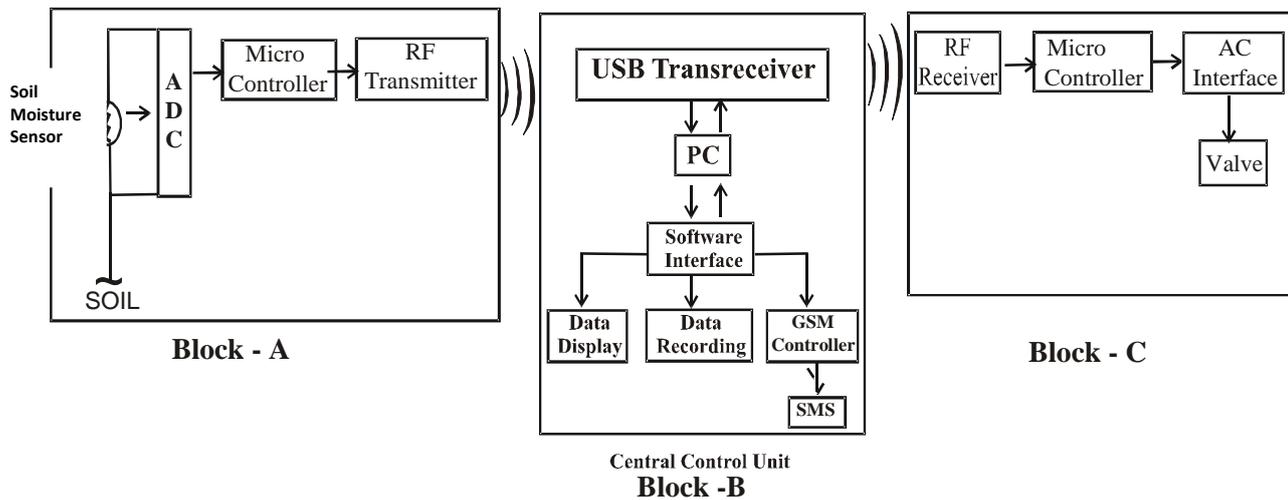

**Fig 1: Block Diagram of Smart Watering System**

### Block A

The system will acquire soil moisture information from soil individually for different plots through a 10HS Decagon moisture sensor probe installed in individual plots. The information thus obtained through sensor will be converted to RF signals, with suitable circuitry developed with universal development board; and each signal will be made unique with help of AVR micro-controller programming [5]. The accuracy and reproducibility of RF sub-units will be tested and their standards will be elevated to cope-up with real-life problem. This will be obtained and assured by lab experimentation of RF sub-units through application of Function Generator and Oscilloscope; powered by constant voltage and current supply equipment. The information signal thus generated by micro-controller will be propagated to central controlling unit and received with wireless RF modem [6].

### Block B

The information signal thus received will be provided to the USB RF trans-receiver which analyses and process the signal for next stage. After trans-receiver the information will be dealt by the software developed in Microsoft platform installed in a desktop PC. This software then delivers the task of monitoring, recording (for database development) and controlling in the field by generating control signals. There will also be a GSM unit that sends whole day summary of data acquired to the owner of estate through an SMS.

### Block C

Moreover the task of restoration of soil moisture will be made available in manual and fully automatic mode. In manual mode, the operator needs to authorise the control signal for opening and closing of electric control valve. However in auto-mode, after complete analysis of signal information, the embedded system will self-generate control signal which independently open/shuts control valve.

## V. CONCLUSION

The above paper presents the challenges, significance and advantages of Smart Watering System in tea gardens. It describes the role of components in development of such system giving a priority based brief structure of system applicable in real world. Its application in real life will reduce production cost, enhance productivity and introduce automation in tea gardening. However with a proper set of tools this approach can be used as automated platforms with multiple functions like data logging, GSM [7] based monitoring and AI [8] based automated watering and monitoring system.

## REFERENCES

- [1] Remote Sensing a Tool to Measure and Monitor Tea Plantations in Northeast India Rishiraj DUTTA; The Netherlands.
- [2] Design of embedded systems for the automation of drip irrigation by K. Prathyusha, M. Chaitanya Suman (ISSN 2319 – 4847).
- [3] Developing tools for decision support system framework for tea production system using a wireless sensor network (WSN) by Centre for Development of Advanced Computing (C-DAC), Kolkata and Tocklai Experimental Station.

- [4] Ramesh Gaonkar, "Microprocessor Architecture, Programming and Application with th 8085", Fifth Edition, PRI.
- [5] Muhammad Ali Mazidi, Janice Gillispie Mazidi, "The 8051 Microcontroller and Embedded Systems", Low Price Edition, PEARSON.
- [6] Paulo S.R. Diniz, Eduardo A.B. da Silva, Sergio L. Netto Digital Signal Processing: System Analysis and Design.
- [7] GSM Based Automated Embedded System for Monitoring and Controlling of Smart Grid, Amit Sachan, World Academy of Science, Engineering and Technology International Journal of Electrical, Robotics, Electronics and Communications Engineering Vol:7 No:12, 2013.
- [8] Sustainable Built Environment- Vol. II-*Monitoring of surface water quality*-Masaharu Fukue, Yoshio Sato, Catherine Mulligan.

