

A REVIEW ON STEEL FIBER REINFORCED CONCRETE IN COMPRESSION MEMBER

Ms.Laxmipriya P. Pudage¹, Prof. Mandar M. Joshi²
 PG Student of civil engg¹, Head of Department civil engineering²
 Pankaj Laddhad Institute of Technology and Management Studies Buldana^{1,2}

ABSTRACT : *Research has shown that the addition of steel fibers can improve many of the properties of concrete elements including tensile resistance, fracture toughness and crack control. These enhancements in performance result from the influence of the randomly oriented fibers in arresting cracks and the resulting improvements in the post-cracking resistance of the concrete. Although a large body of research on the structural applications of steel fiber reinforced concrete (SFRC) exists, the potential of using this material in load-carrying structural elements has yet to gain wide acceptance in construction. In this paper effect of fibers on the strength of concrete for M 30 grade have been studied by varying the percentage of fibers in concrete. Fiber content were varied by 0%, 0.5%, 1%, 1.5% by volume of cement.colum specimen of size(150 mm x 150 mm x 600 mm) to check compressive strength at 7 and 28 days of maturity in normal water curing. The results of fiber reinforced concrete for 7days and 28days curing with varied percentage of fiber were studied and it has been found that there is significant strength improvement in steel fiber reinforced concrete. Also, it has been observed that with the increase in fiber content up to the optimum value increases the strength of concrete. Slump cone test was adopted to measure the workability of concrete. The Slump cone test results revealed that workability gets reduced with the increase in fiber content.*

KEYWORDS – SFRC, WORKABILITY,COMPRESSIVE STRENGTH

I. INTRODUCTION

Steel Fibre reinforced concrete (SFRC) is defined as concrete made with hydraulic cement containing Fine and coarse aggregate and discontinuous discrete fiber. In SFRC, thousands of small fibers are dispersed and distributed randomly in the concrete during mixing, and thus improve concrete properties. SFRC is being increasingly used to improve static and dynamic tensile strength, energy absorbing capacity and better fatigue strength. Over the years the use of the steel fiber has been considerably increased in all over the world, The technique by adding the steel fibers in the concrete mix and enhances the performance of the concrete has been very popular among the engineers and contractors . Steel fibers has been already used in many large project involving constructions of industrial floors, overlays, pavements, highways, tunneling , slope stabilization etc . Addition of the randomly oriented steel fiber in the concrete mix has been very effective in controlling the propagation of micro cracks in the concrete, thus there has been a fair chances of improving the Strength and ductility of the concrete. Generally the hooked steel fiber has been used for the construction of the FRC columns, but in this experimental programme crimped steel fibers has been used. In this experimental programme every specimen has been tested and analyzed and Comparison has been done to investigate the behavior and the effectiveness of each specimen. Based on the result Normalized load Vs Normalized Strain curve , the load Vs strain curve has been plotted and discussed . By the result it has been noticed the use of the steel fiber enhances the toughness and strain at peak load of the concrete.

Why SFRC?

1. To eliminate many undesirable property and to enhance many desirable property of the plain concrete.
2. To increase the density and strength of transition zone. Toughness and strain at peak stress.
3. To study the helping behavior of fiber to transfer loads at the internal micro cracks.
4. To improve the fatigue strength property at all stress levels.
5. To arrest the early spelling of the cover and increase the load taking capacity as well as the ductility of the columns over that of comparable non fiber-reinforced specimens.
6. To study the structural behavior of steel fiber reinforced concrete column having square in cross section of size 150mm X 150mm X 600 mm under axial loading.
7. To study the effect of transverse reinforcement on column performance.

II. LITERATURE REVIEWS

Prashant Y.Pawade, [1] studied in the research work a series of compression tests were conducted on 150mm, cube and 150mm x 300mm, cylindrical specimens using a modified test method that gave the complete compressive strength, static, dynamic modulus of elasticity, ultrasonic pulse velocity and Stress strain behavior using silica fume with and without steel fiber of volume fractions 0, 0.5, 1.0, and 1.5 % , of 0.5mm Ø of aspect ratio of 60 on Portland Pozzolona cement concrete. As a result the incorporation of steel fibers, silica fume and cement has produced a strong composite with superior crack resistance, improved ductility and strength behavior prior to failure. Addition of fibers provided better performance for the cement based composites, while silica fume in the composites may adjust the fiber dispersion and strength losses caused by fibers, and improve strength and the bond between fiber and matrix with dense calcium silicate hydrate gel. The results predicted by mathematically modeled expressions are in excellent agreement with experimental results. On the basis of regression analysis of large number of experimental results, the statistical model has been developed. The proposed model was found to have good accuracy in estimating interrelationship at 28 and 90 days age of curing.

Similarly, S. A. Mahadik, [2] experimented in the research work that the Cement concrete is the most extensively used construction material in the world. The reason for its extensive use is that it provides good workability and can be moulded to any shape. Ordinary cement concrete possesses a very low tensile strength, limited ductility and little resistance to cracking. Internal micro cracks, leading to brittle failure of concrete. In this modern age, civil engineering constructions have their own structural and durability requirements, every structure has its own intended purpose and hence to meet this purpose, modification in traditional cement concrete has become mandatory. It has been

found that different type of fibers added in specific percentage to concrete improves the mechanical properties, durability and serviceability of the structure. It is now established that one of the important properties of Steel Fiber Reinforced Concrete (SFRC) is its superior resistance to cracking and crack propagation. In this paper effect of steel fibers on the strength of concrete for M 40 grade have been studied by varying the percentage of fibers in concrete.

Similarly, J. A. O. Barros [3] studied the results of the uniaxial compression tests performed under displacement control condition, a stress-strain relationship for fiber concrete in compression was derived. Three-point bending tests on notched beams were carried out in order to simulate the post-cracking behavior and to evaluate the fracture energy. Based on the constitutive relationships derived from the experiments, a layered model for the analysis of steel fiber reinforced concrete cross sections was developed.

Ehab m. Lotfy [4] experimented investigation of the axial behavior of small scale square reinforced concrete columns with fiber reinforced polymer (FRP) bars, as a solution to overcome the corrosion problems, where this material represents a relatively new technology; therefore much research is needed to determine its characteristics and gain confidence to be accepted by engineers for practical application. Increasing of characteristic strength of concrete has significant effect on the behavior of tested columns where increase toughness and ductility of tested columns. So GFRP bars can be used as main reinforcement in columns with increasing the transverse reinforcement along columns length and using high strength concrete.

[6] Aiswarya Sukumar (2014), Tested the steel fiber reinforced concrete to check the influence of fibers on strength of concrete. According to various research papers, it has been found that steel fibers give the maximum strength in comparison to glass and polypropylene fibers. Hence, in this project he was interested to find the effect of steel fibers in concrete. An experimental investigation on the behavior of concrete specimens reinforced with steel fibers and subjected to compressive and flexural loading is presented. Tests were conducted on specimens with three different fiber volume fractions. The findings of the above studies indicate that the addition of steel fibers to concrete improve not only the strength characteristics but also the ductility. From the test results of compressive strength, split tensile strength and flexural strength, it can be seen that, in the presence of steel fiber there is an increase in compressive strength, split tensile strength and flexural strength. The crack formation is also very small in fiber specimen compared to the non fiber specimens

[7] Samadhan Garad, Experimented in the research work that develops high performance concrete by using fibers in concrete up to certain proportions. The present work deals with the results of experimental investigations on glass fiber reinforced concrete. Effect of these fibers on strengths of concrete are studied. Fiber content varied from say (1.0%, 2.0%, 3.0%, 4.0 % & 5%) by weight of cement. Various strengths considered for investigation are compressive strength and flexural strength for glass fiber reinforced concrete. For this he used M-20 Grade of Concrete. The maximum compressive strength achieved is glass fiber concrete is 40.66 Mpa, 5% as compare to 22.10 Mpa of strength of plain cement concrete. The maximum flexural strengths achieved is 4.44 Mpa at 5% glass fiber as compare to 2.9 Mpa of strength of plain cement concrete.

[8] Komal Chawla (2013), studied about the about plain concrete possess very low tensile strength, limited ductility and little resistance to cracking. Internal micro cracks are inherently present in concrete and its poor tensile strength is due to propagation of such micro cracks. Fibers when added in certain percentage in the concrete improve the strain properties well as crack resistance, ductility, as flexure strength and toughness. Mainly the studies and research in fiber reinforced concrete has been devoted to steel fibers. Portland pozzolona cement of 43 Grade is used. The modulus of elasticity of glass fiber reinforced concrete is increases 4.14 % compared with conventional reinforced concrete. The percentage increase of flexure strength of various grades of glass fiber concrete mixes compared with 28 days compressive strength is observed 5.19%

[9] Ehab m. Lotfy(2010), Experimented investigation of the axial behavior of small scale square reinforced concrete columns with fiber reinforced polymer (FRP) bars, as a solution to overcome the corrosion problems, where this material represents a relatively new technology; the refore much research is needed to determine its characteristics and gain confidence to be accepted by engineers for practical application. Increasing of characteristic strength of concrete has significant effect on the behavior of tested columns where increase toughness and ductility of tested columns. So GFRP bars can be used as main reinforcement in columns with increasing the transverse reinforcement along columns length and using high strength concrete.

III. MATERIAL USED

- Cement.
- Fine Aggregates.
- Coarse Aggregate.
- Super plasticizer.
- Steel fibers.
- Water

3.1. Cement.

In this present investigation Ordinary Portland Cement (OPC) of 53-grade obtained from AMBUJA Cements Pvt. Ltd was used conforming to IS 12269–2004 was used. As per IS 4032 for the chemical composition of OPC 53. Specific Gravity was found out 3.04 for OPC of 53-grade cement

Fine Aggregates

Locally available sand from man river with 4.75 mm maximum size was used as fine aggregate with specific gravity 2.55, Fineness Modulus = 2.65. confirming to IS 383–1987. The sieve analysis has confirmed that fine aggregate is of zone II. Its average water absorption was found to be 1.

3.2. Coarse Aggregate

Locally available crushed stone with maximum size 20mm was used as coarse aggregate with specific gravity of 2.78, fineness modulus=6.78 confirming to IS 383–1987. Coarse aggregates having a maximum size of 20mm were used in this project work where 40% of it was passing through 20mm IS sieve and retaining on 12.5mm IS sieve and 60% was passing on 12.5mm IS sieve and retained on 4.75mm sieve.

3.3. Super Plasticizer

Commercially available super plasticizer CICO Plast Super C 300 obtained from CICO Technologies Ltd. Pune has been used as super plasticizer. Super plasticizer was mixed in the amount of 2 % of cementitious material confirming to IS 9103-1999. The specific gravity and

pH of super plasticizer used are 1.12 and 5.0 respectively. Super plasticizers are introduced in SFRC to obtain the fluidity. Nevertheless, a high dosage near the saturation amount can increase the proneness of the concrete to segregate.

3.4. Steel fibers

High Tensile Crimped Steel Fibers procured from KASTURI METAL COMPOSITES Pvt. Ltd. Amravati. was used in this experimental work. The properties of the Steel Fibers used are given in Table

Table 1: Properties of Steel Fibers

Fiber Type	Aspect Ratio	Length (mm)	Diameter (mm)	Tensile Strength N/mm ²
Crimped Type	20-100	50	1	750 N/mm ² to 1100 N/mm ²

3.5. Water

In this study, normal tap water available in the concrete laboratory was used. Water conforming to the requirements of water for concreting and curing as per IS: 456-2000.

IV. MIX DESIGN

Ordinary Portland cement of 53 grade was used. The coarse aggregates used were crushed aggregate passing through 20 mm sieve size and retaining on 4.75 mm sieve size. The fine aggregate used was uncrushed sand. The mix design was confirming to IS 10262:2009. Water cement ratio of 0.45 was adopted. Throughout the test the concrete used was M30 grade and end hooked steel fiber have been used. Commercially out there super plasticizer CICO Plast Super C 300.

Table 2: Mix Proportion For Trial Mix

Mix	Trial-I	Trial-I	Trial-I
Cement kg/m ³	350	388.88	318.18
Fine Aggregate kg/m ³	896	849.24	949.08
Coarse Aggregate kg/m ³	1140	1153.69	1114.13
Water kg/m ³	140	140	140

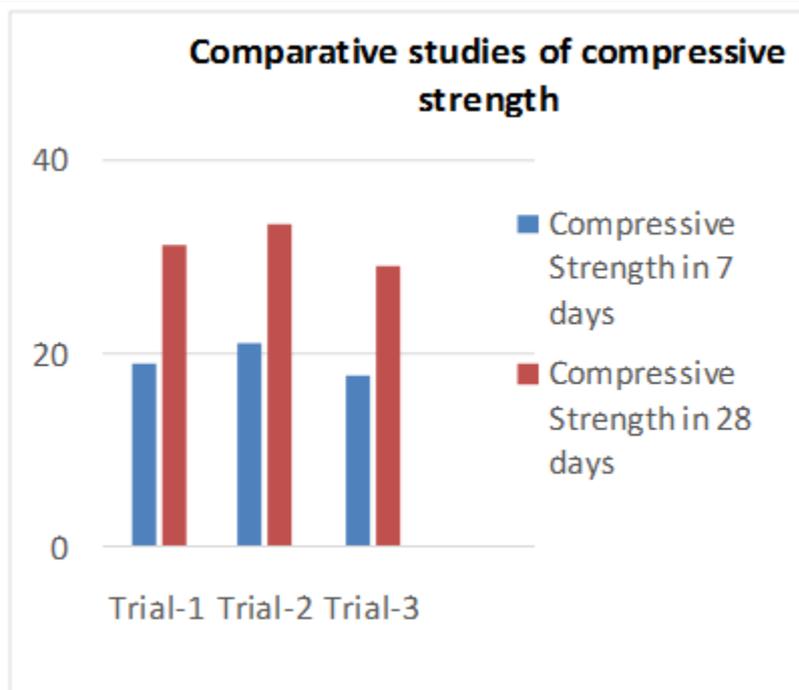


Fig.1: Comparative Study of Compressive Strength

PREPARATION OF SFRC MIXES

The mixing is done manually as hand mixes. The coarse and Fine aggregates are dried for about 30s. This is then followed by the addition of Cement. After mixing is done remaining water along with super plasticizer are added and mixed thoroughly and then the mixes were checked for fresh properties and the casted in specimen moulds for checking the hardened mixes. This wet composition is allowed to mix for

four minutes. During the process, fiber was sprinkled uniformly in the wet mixture. The moulds were filled with the mix prepared. After 24 hours the specimens are demolded and are transferred to curing tank for normal water curing at 7 and 28 days of maturity.

After 24 hours of casting, specimens are kept for 28 days normal water curing without disturbance until it attains a hardened state. Fibers are added in the proportions of 0.0% (reference mix), 1%, 1.5%, 2% with the replacement of cement and Fly Ash is added (30% by weight of cement) was added to this for all mixes to cast various SFRC specimens.

Table 3: Compressive Strength with different fiber content

Mix	M 0	M 0.5	M 1	M 1.5	
Fiber content	0	0.5	1	1.5	
Compressive strength	7days	21.1	26.17	27.16	26.43
	28days	33.5	33.91	35.4	34.22

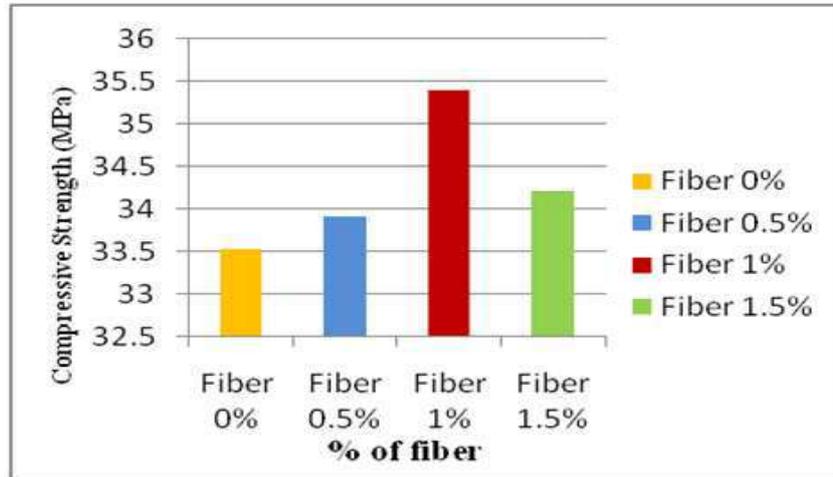


Fig.2: Comparative Study of Compressive Strength

Tests on Fresh Properties of SFRC

Experimental study proceeds in two stages. Firstly, for the purpose of determining the fresh properties, slump tests were performed for each SFRC mixtures. Secondly, hardened properties were determined. The compressive strength test was performed at 28 days. Eventually, toughness and first crack load of specimens were obtained as well as compressive strengths.

Slump test

Workability is the measure of the ability of concrete to be mixed, handled, transported, placed, and consolidated. Slump test is used to determine the workability of fresh concrete. Slump test is performed per IS: 1199 – 1959

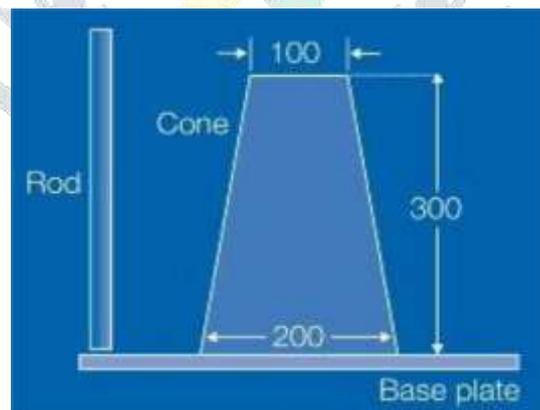


Fig 3: Slump Flow Apparatus

Compaction Factor Test

Compacting factor of fresh concrete is done to determine the workability of fresh concrete by Compacting factor test as per IS: 1199 – 1959. From Compaction factor Apparatus specified in IS: 1199-1959



Fig 4: Compaction Factor Apparatus

Compressive Strength Test

Compressive strength of concrete depends on many factors such as water-cement ratio, admixture, cement strength, quality of concrete material, and quality control during production of concrete etc. The effect of fibers on the compressive strength of concrete has been discussed in many studies and resulted that these fibers either decrease or increase the compressive strength of concrete.

V. CONCLUSION

- It is observed that the workability of steel fiber reinforced concrete gets reduced as the percentage of steel fibers increases
- Compressive strength goes on increasing by increase in steel fiber percentage up to the optimum value. The optimum value of fiber content of steel fiber reinforced concrete was found to be 1%.
- While testing the specimens, the plain cement concrete specimens have shown a typical crack propagation pattern which led into splitting of beam in two piece geometry. But due to addition of steel fibers in concrete cracks gets ceased which results into the ductile behavior of SFRC. Generally it's found that SFRC column has higher values of malleability as compared to plain RCC column. SFRC column could also be required for earthquake resisting structures.
- The columns posses fiber exhibited less fluctuations of the load as compared to the plain reinforced columns
- As the percentage of the fiber increases , the load resisting capacity against cracking of the column specimen increases
- The steel fiber columns exhibited better toughness and higher strain at peak load in comparison to the plain concrete columns

VI. REFERENCES

- [1] Performance of steel fiber on standard strength concrete in compression Prashant Y.Pawade, 1 Nagarnaik P.B. 2 , Pande A.M. international journal of civil and structural engineering Volume 2, No 2, 2011
- [2] Nataraja M.C., Dhang N. and Gupta A.P, (1998), "Steel fiber reinforced concrete under compression", The Indian Concrete Journal, 26(3), pp 353356.
- [3] steel fiber reinforced concrete Nguyen van chanh (1)steel fibre reinforced concreteAbdul Ghaffar1 Assistant Professor, Jawaharlal Darda institute of Engineering and Technology, International Journal of Engineering Trends and Technology (IJETT) – Volume 9 Number 15 - Mar 2014 ISSN: 2231-
- [4] Experimental Study on Steel Fiber Reinforced Concrete for M-40 Grade A.M. Shende1,Assistant Professor & J.L.Chaturvedi College of Engineering, Maharashtra, India. International Refereed Journal of Engineering and Science (IRJES) ISSN (Online) 2319-183X, (Print) 2319-1821 Volume 1, Issue 1 (September 2012), PP. 043-048 www.irjes.com
- [5] Ganeshan N et al, (2007) „steel fibre reinforced high performance concrete for seismic resistant structure“ Civil Engineering and construction Review, December 2007, pp 54-63
- [6] BIS 383:1970 Specification for coarse and fine aggregates from natural sources for concrete (second revision).
- [7] Study of steel fiber reinforced short columns under concentric loadingDanish Irfan M.Tech Student, Civil Engineering ,MRIU ,Faridabad October 2016 | IJIRT | Volume 3 Issue 5 | ISSN: 2349-6002
- [8] Faisal fouad, "Properties and Applications of Fiber Reinforced Concrete" Faculty of Engineering, King Abdul aziz University, Jeddah, Saudi Arabia JKAU :Eng.sci Vol-2 pp 44-63, 1990.
- [9] Kukreja C.B , Kaushik S.K., Kanchi M.B , and Jain O.P, "Flexural characteristics of steel fibre reinforced concrete", Concrete Journal, July (1980), pp.184-188.