

# A Simulation Approach Using Linear Programming Model to Propose Best Coal Blend for the Production of Coke

Prashant Kumar Pandey<sup>1</sup>, Rajeev Rathi<sup>1</sup>, Vishaldeep Singh<sup>1</sup>

<sup>1</sup> Mechanical Engineering Department, Lovely Professional University, Punjab, India

## Abstract

Coke creation is a significant contamination source since the presence of high carbon content and different debasements. Hence, rather than one explicit coal, the mixed coal ought to be planned which may help in accomplishing better coal properties because of the determination of ideal metallurgical substance. In the present investigation, a linear programming approach has been utilized to accomplish the alluring extent of constituents. MATLAB programming has been consolidated further, for making coal mixes having different qualities and display different applications for example shoot heater in steel creation businesses and so forth Seven coal tests are utilized for making coal mixes. Results demonstrate that low debris, low dampness, low Sulfur guarantees predominant coke creation with improved proficiency of coke stove plant and coke quality.

**Keywords:** Coke production, Blended coal, Linear Programming model, MATLAB, Blast furnace

## 1. Introduction

Coal is a biological/organic rock available in the earth's crust and contains mostly carbon (C). It also has a hydrogen, oxygen, sulfur and nitrogen, as well as some inorganic constituents/minerals. To fulfill the requirement of good quality coke, metallurgical coals are used in India. Hence, preparation/design of coal blends for carbonization is very much important in terms of cost, quality, and resource utilization [1]. Coal blend design mainly targets improving the coke quality like hot strength and cold strength of coke. Hot strength is defined by the value of CSR (coke strength after reaction), and CRI (coke reactivity index), while the value of M40 is the measure of cold strength of coke. CRI is a reaction rate of coke and CSR indicates the strength of coke to break into smaller size. Cold strength measure strength and hardness of coke which is depends upon fluidity, volatile matter and heating value of coal (calorific value of coal). CSR is greatly influenced by ash composition of coal blend. It is possible to predict CRI from ash chemistry by using non-linear equations [2-3].

Traditionally, "by product coke oven processes" is utilized for coke formation, where selective coals are blended, oiled in a proper bulk density fluid and then pulverized before carbonization process [4]. In this process, heat is transferred from brick wall to charging coal. Firstly, moisture is removed at temperature 200°C. The coal is decomposed in the form of plastic layer near the walls in between 375°C to 475°C and when the temperature is further raised between 475°C to 600°C, plastic layer is converted into semi coke with the help of re-solidification process. Finally, coke stabilization phase begins at 600°C to 1100°C [5].

## 2. Related work

Relations which are given below is used for calculation of hot strength and cold strength of coal and are obtained from TATA steel Jamshedpur, India according to its experimental data. Figure 1 shows that with increase in

vitritine %age the CSR value goes down, which also hinders the strength of coke. The vitritine %age also affects the M40 value of a coal and previous experimental results indicates that more is the availability of vitritine %age, lesser would be the value of M40 (figure 2).

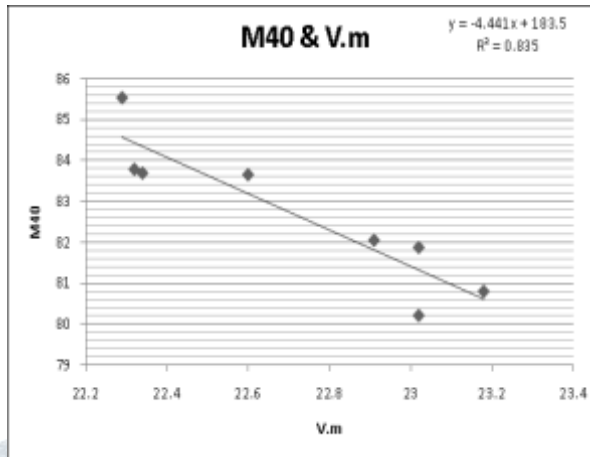
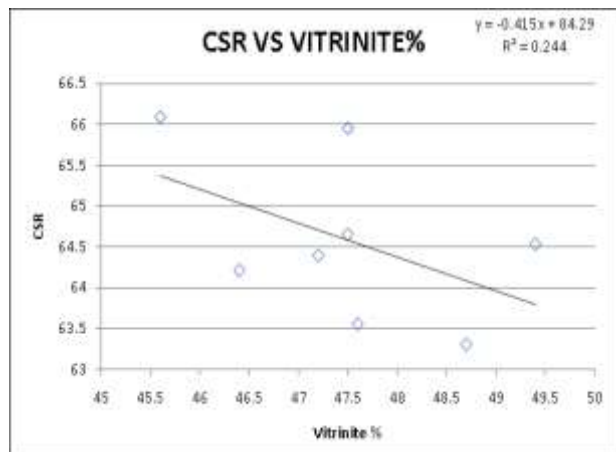


Figure 1: Graph between CSR and Vitrinite %

Figure 2: Graph between M40 and VM

The selection of an appropriate coal most importantly depends on CSR and CRI values and these two are found to be inversely proportional to each other (figure 3). The CSR and CRI values are further dominated by various constituents of coal, therefore to get better coal properties, the coal blend should be prepared with optimum proportions of all such elements.

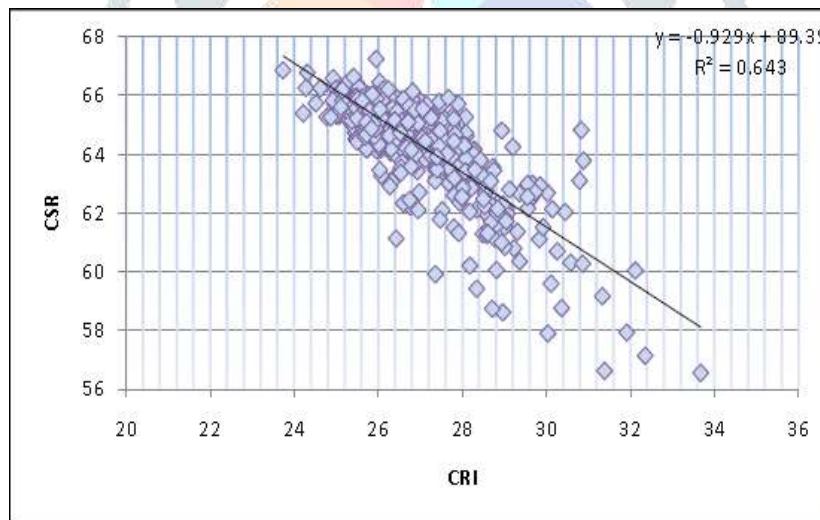


Figure 3: Graph between CSR and CRI

Comprehensive literature survey stipulates the target properties of a coal blend as given below.

Target properties of coke:

CSR ≥ 65	M40 ≥ 82	CRI ≤ 28
----------	----------	----------

$$CSR = -0.415 (\text{Vitrinite \%}) + 84.29$$

$$M40 = -4.441 (\text{VM}) + 183.5$$

$$M40 = 0.022 (\text{Fluidity}) + 73.76$$

$$CRI = -0.929 (\text{CSR}) + 89.39$$

### 3.Methodology and Experimental Data

#### 3.1 Linear programming model

Basis = 1 gm

$$\text{Min } Z = Z_1X_1 + Z_2X_2 + Z_3X_3 + Z_4X_4 + Z_5X_5 + Z_6X_6 + Z_7X_7$$

Subjected to

$$X_1 + X_2 + X_3 + X_4 + X_5 + X_6 + X_7 = 1$$

$$A_1X_1 + A_2X_2 + A_3X_3 + A_4X_4 + A_5X_5 + A_6X_6 + A_7X_7 \leq 13\%$$

$$VM_1X_1 + VM_2X_2 + VM_3X_3 + VM_4X_4 + VM_5X_5 + VM_6X_6 + VM_7X_7 \leq 24\%$$

$$S_1X_1 + S_2X_2 + S_3X_3 + S_4X_4 + S_5X_5 + S_6X_6 + S_7X_7 \leq 0.83$$

$$M_1X_1 + M_2X_2 + M_3X_3 + M_4X_4 + M_5X_5 + M_6X_6 + M_7X_7 \leq 0.75$$

$$V_1X_1 + V_2X_2 + V_3X_3 + V_4X_4 + V_5X_5 + V_6X_6 + V_7X_7 \leq 54.2$$

$$C_1X_1 + C_2X_2 + C_3X_3 + C_4X_4 + C_5X_5 + C_6X_6 + C_7X_7 \leq 6$$

The value of variables must be,  $0 < X_1, X_2, X_3, X_4, X_5, X_6, X_7 > 1$

These linear equations were further solved by MATLAB software.

Fluidity of blend = Antilog  $[\sum (\% \text{ of coal } A_i \times (\text{Fluidity of } A_i))]$

A= Type of coal,  $i = 1, 2, 3 \dots$

#### 3.2 Experimental data

Different coal samples used in coke oven plant for making coal blend, were taken into account to formulate the linear programming model. The information available regarding the various analysis including ultimate analysis, proximate analysis and other properties of coal were collected. The ultimate analysis (table 1) is a chemical approach which incorporates the carbon (%), hydrogen(%), nitrogen(%), sulphur(%) and oxygen(%) in a coal. The nitrogen content in coals are almost found in the range of 1-2%. The oxygen present in coals helps it burn more easily and better ignition efficient.

**Table 1: Ultimate analysis of coal**

Type of coal	Carbon %	Oxygen %	Sulphur %
Anthracite	78	3.79	0.7
Bhelatand	73.02	2.87	0.59
Russian coal	74.9	17.85	0.53
New Zealand	76.03	13.85	2.28
West Bokaro	73.45	4.73	0.77
Semi soft coal	80	4.07	0.51
R.P.C.	86	5.45	2.5

Proximate analysis (table 2) of coal is done to find ash (%), volatile matter (%), moisture content (%) and fixed carbon (%).

**Table: 2 Proximate Analysis and Calorific value of coal:**

S.No	Type of coal	Ash %	Volatile matter %	Moisture %	Fixed Carbon %	Calorific Value Kcal/kg
1	Anthracite	12.59	13	0.58	76	7260
2	Bhelatland	17.98	18	0.5	63.65	6990
3	Russian coal	0.68	27	2	71	7275
4	New Zealand	5.12	32.03	2.45	56.78	7548
5	West Bokaro	14.1	24.37	0.5	58.45	7065
6	Semi soft coal	10	17.54	0.49	72.67	7800
7	R.P.C.	0.68	9.1	0.3	91	7575

#### 4. Results and Discussion

The optimum blend contribution with the help of linear programming model and MATLAB software were analyzed. The linear equations included various coal properties like ash, VM, moisture, vitrinite, blend cost etc. Further calculations evolve, attainment of theoretical hot strength and cold strength of coke with the help of correlations between coal and coke properties.

The coal contribution of different blend samples was obtained as specified in table 3. The coal properties vary for dissimilar blends and so the cost as well (table 4). According to selected target properties we suggest blend 4, blend 5, blend 8, blend 11 and blend 13 as better coal blend (table 5).

**Table 3: Blend's coal Contribution**

Blend	West bokaro coal (A)	New Zealand coal (B)	Bhelatland coal (C)	Russian coal (D)	Semi soft coal (E)	R.P.C (F)	Anthracite coal (G)
1	78.35%		10.44%	11.21%			
2	86.48%			5.85%	7.67%		
3	80.60%	6.24%			13.16%		
4			27.24%			8.89%	63.87%
5	64.37%					4.72%	30.91%
6			53.85%		32.24%	13.92%	
7	84.60%				10.37%	5.03%	
8	55.66%	5.76%					38.58%
9	91.80%			4.15%		4.04%	
10	87.35%			7.63%			5.02%
11		9.69%	21.04%				69.27%
12			73.19%	20.18%	6.63%		
13			38.90%	14.16%			46.93%

**Table 4: Coal blend properties**

Blend	Blend cost	Ash	VM	Sulphur	Moisture	Vitrinite	CSN
1	3774	13	23.99	0.72	0.67	53.31	4.7
2	3400	13	23.99	0.74	0.59	52.04	4.5
3	3622	13	23.94	0.83	0.62	52.20	4.5
4	8785	12.84	14.01	0.80	0.52	41.41	1.5
5	5220	12.82	19.86	0.80	0.51	46.2	3.2
6	5790	12.82	16.42	0.83	0.47	53.03	3.4
7	3225	13.44	22.92	0.83	0.49	52.11	4.4
8	6105	12.80	19.94	0.80	0.61	45.02	3.0
9	3100	13.02	23.86	0.83	0.55	53.05	4.7

10	3136	12.95	24.01	0.74	0.62	51.92	4.5
11	9632	12.95	15.89	0.83	0.74	41.69	1.5
12	6245	13.33	19.22	0.70	0.80	56.31	4.4
13	8612	12.99	16.73	0.63	0.75	45.69	2.4

Table 5: Hot and cold strength of coke

Blend	CSR	CRI	M40
1	62.16	31.64	91.64
2	62.70	31.14	94.47
3	62.62	31.21	91.05
4	67.10	27.05	97.69
5	65.11	28.90	87.93
6	62.28	31.43	94.06
7	62.66	31.17	96.50
8	65.60	28.44	86.20
9	62.27	31.54	99.80
10	62.74	31.10	92.17
11	66.98	27.16	93.47
12	60.92	32.80	88.37
13	65.32	28.70	91.88

## 5. Conclusion

The hot and cold strength of various feasible/possible coal blends were calculated in view of miscellaneous parameters like ash, VM, fluidity, vitrinite etc. The estimation of the hot and cold strength of coke were done taking the diverse coke properties into consideration. The results show that the blast furnace performance can be increased by hot strength of coke which mainly encountered by numerous coke parameters. It has been found that the linear programming model may assist in obtaining a correct coal blend.

## 6. References

- [1] Nag, D., Haldar, S.K., Choudhary, P.K. and Banerjee, P.K., Prediction of coke CSR from ash chemistry of coal blend. *International Journal of Coal Preparation and Utilization*, vol.29(5), pp.243-250, 2009.
- [2] Haapakangas, Juho, Juha Uusitalo, Olli Mattila, Tommi Kokkonen, David Porter, and Timo Fabritius. "A method for evaluating coke hot strength." *steel research international* 84, vol. 1, pp. 65-71, 2013.
- [3] Haapakangas, Juho A., Juha A. Uusitalo, Olli J. Mattila, Stanislav S. Gornostayev, David A. Porter, and Timo MJ Fabritius. "The Hot Strength of Industrial Cokes–Evaluation of Coke Properties that Affect Its High-Temperature Strength." *steel research international* 85, vol. 12 pp.1608-1619, 2014.
- [4] Guo, Zhancheng, and Huiqing Tang. "Numerical simulation for a process analysis of a coke oven." *China Particuology* 3, vol. 06, pp. 373-378, 2005.
- [5] Lundgren, Maria, Lena Sundqvist Ökvist, and Bo Björkman. "Coke reactivity under blast furnace conditions and in the CSR/CRI test." *steel research international* 80, vol. 6, pp. 396-401,2009.
- [6] Kramer, Robert, and Energy Efficiency Director. "Development of Coking/Coal Gasification Concept to Use Indiana Coal for the Production of Metallurgical Coke, Liquid Transportation Fuels, Fertilizer, and Bulk Electric Power Phase II." (2007).
- [7] Nomura, Seiji, Hiroyuki Ayukawa, Hisatsugu Kitaguchi, Toshihide Tahara, Shinroku Matsuzaki, Masaaki

Naito, Satoshi Koizumi, Yoshikuni Ogata, Takeshi Nakayama, and Tetsuya Abe. "Improvement in blast furnace reaction efficiency through the use of highly reactive calcium rich coke." *ISIJ international* 45, vol. 3, pp. 316-324, 2005.

[8] Van Niekerk, W. H., and R. J. Dippenaar. "Blast-furnace coke: a coal-blending model." *Journal of the Southern African Institute of Mining and Metallurgy* 91, vol. 2, pp. 53-61, 1991.

[9] W.G. Dow, "Kerogen studies and geological interpretations: Journal of geochemical exploration," *Journal of geochemical exploration*, vol. 7, pp. 79 – 99, 1977.

