



AI Quality Analysis of “SPUR GEAR” by Image Processing

Prof. Tushar.S.Jagtap, Adesh Hajare, Saurabh Jaiswal, Yogesh Hatekar, Digvijay Jagtap

Assistant Professor, Department of Mechanical Engineering, SKNCOE, Pune, India

Student, Department of Mechanical Engineering, SKNCOE, Pune, India

ABSTRACT

ARTICLE INFO

Article history: In our project, we're implementing a comprehensive quality control system for gears in manufacturing. Instead of sampling only a few gears from a batch, our system checks every gear using a conveyor belt and a camera. This camera captures images and checks parameters against stored data. Gears that meet the criteria are accepted, while those that don't are rejected. Precision in gear measurement is crucial, but current methods are either time-consuming or costly. To address this, we're leveraging computer vision technology to develop a non-contact measurement system capable of accurately measuring most spur gear parameters rapidly. Our vision system has been calibrated and validated using sample gears, demonstrating high accuracy, especially for small gears. Quality control, Gears, Manufacturing, Sampling, Conveyor belt, Camera, Parameters, Precision measurement, Computer vision technology, Non-contact measurement, Calibration, Validation, Accuracy, Rapid measurement

Keywords: technology to develop a non-contact measurement system capable of accurately measuring most spur gear parameters rapidly. Our vision system has been calibrated and validated using sample gears, demonstrating high accuracy, especially for small gears. Quality control, Gears, Manufacturing, Sampling, Conveyor belt, Camera, Parameters, Precision measurement, Computer vision technology, Non-contact measurement, Calibration, Validation, Accuracy, Rapid measurement

1. Introduction

Gears are essential mechanical components used to transmit power between shafts. They come in various types such as spur gears, helical gears, and worm gears, and find applications in diverse machinery like automobiles, metal cutting tools, and marine power plants. The friction and losses in gear drives are minimal compared to other power transmission methods.

Our work utilizes MATLAB software for determining gear parameters, leveraging its accuracy and built-in functions. This user-friendly program simplifies design calculations, reducing errors and making gear design more efficient. In today's fast-paced computational world, industries increasingly rely on computers and algorithms for manufacturing tasks, including gear filtering and classification. Human labor is limited by time and cost, making automation crucial for efficiency.

Image processing technology, a subset of computer science, is integral to gear measurement and classification. By converting gear images to grayscale and developing algorithms, we accurately measure gear features such as outer and inner diameters, tooth count, tooth height, and pitch circle diameter. This approach streamlines the measurement process, ensuring gears meet specific size requirements.

Gear transmissions play a vital role in machinery, influencing motion properties through linear and rotary developments. Despite being an old technology, gear transmissions remain complex, necessitating accurate measurement of gear parameters. Specialized tools like tooth calipers are used for this purpose, considering variations in gear profiles, sizes, and tooth counts.

In conclusion, our research demonstrates the efficacy of image processing and computational tools in accurately measuring gear parameters, facilitating efficient gear design and manufacturing processes.

2. Literature Review

[1] Haque Nawaz and Himat Ali published a paper titled "Gear Measurement Using Image Processing in MATLAB" in the International Journal of Innovative Technology and Exploring Engineering (IJITEE) in 2014. The study focused on measuring the area and counting the teeth of gear image objects using MATLAB and image processing techniques. The researchers converted the original gear image objects into grayscale to count the teeth using programming code. This work is significant as it aids in gear size limitation and guides further research in computer technologies like digital signal processing (DSP) and digital image processing (DIP).

[2] Cheng Pengfei and Feng Changyong published a paper in the Journal of Multimedia in 2013, discussing the extraction of characteristic values of gear defects through image processing. They utilized MATLAB's image processing toolbox for gear defect detection, leveraging image characteristics to identify different defect forms such as pitting and attrition. The paper highlights MATLAB's powerful data processing capabilities and its application in digital image processing for defect detection.

[3] Milica Babic et al. conducted a comprehensive literature review on image-based quality inspection systems in the manufacturing sector (SMS) over the last decade. They focused on modern imagebased quality inspection systems, particularly in the context of Industry 4.0. The review discusses advancements in digital camera systems and analytics, including artificial intelligence and machine learning algorithms, for quality inspection of three-dimensional parts.

[4] H. Alkhadafe et al. introduced the Automated Sensor and Signal Processing Approach (ASPS) for developing effective condition monitoring systems for gearbox fault diagnosis. The approach combines Taguchi's orthogonal arrays with automated selection of sensory characteristic features to optimize sensor selection and signal processing methods. The experiments demonstrated the effectiveness of the approach for gearbox fault diagnosis using multi-sensory signals and neural network classification models.

[5] Shivani Bhoir et al. proposed a system for gear parameter checking using a conveyor belt, camera, and image processing techniques. The system checks each gear in a batch to ensure quality, preventing rejection of entire batches due to a single faulty gear. This approach improves quality control and efficiency in manufacturing processes.

3. Methodology

The initial step involves reading the original gear image with the tool, followed by converting it to grayscale. Subsequently, the image is thresholded, and the gear area is calculated. The region of interest is then highlighted to facilitate tooth counting, resulting in an accurate representation of the gear's teeth.


A. About MATLAB

MATLAB, short for Matrix Laboratory, serves as an interactive platform tailored for matrix-based computation, primarily geared towards scientific and engineering applications. It stands out as a high-performance language suited for technical computing tasks. Offering a user-friendly environment, MATLAB seamlessly integrates computation, visualization, and programming, allowing users to express problems and solutions using familiar mathematical notations.

Common applications of MATLAB encompass math and computation, algorithm development, modeling, simulation, and prototyping, data analysis and exploration, as well as scientific and engineering graphics. Additionally, it facilitates application development, including the creation of graphical user interfaces.

As a software package specializing in high-performance numerical computation and visualization, MATLAB provides an interactive workspace equipped with an extensive array of built-in functions for technical computation, graphics, and animation. Moreover, its versatility extends to easy extensibility through its proprietary high-level programming language, making it a versatile tool for a wide range of technical tasks.

B. Construction

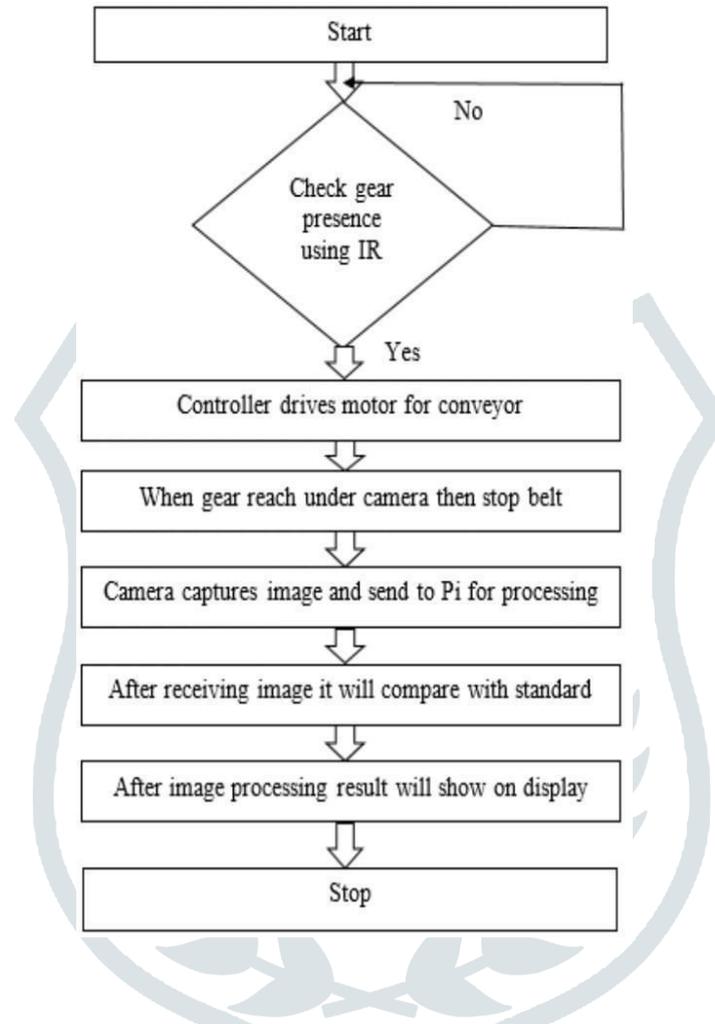

i) MATLAB serves as the core tool for image processing to compute gear parameters and count teeth accurately. ii) The project's central unit is the computer, interfacing with I/O devices via the parallel port. iii) Image processing involves analyzing visual data to extract specific characteristics or parameters.


iv) Standard image-processing techniques treat images as two-dimensional signals and apply corresponding signal-processing methods.

v) Material handling is facilitated by mounting rollers at predetermined distances and placing materials on a belt spanning these rollers. vi) The motor drive, coupled with the rollers, enables controlled movement of the belt and facilitates efficient material handling. vii) Adjustable time delays for material movement are managed through the motor drive. viii) Initially, the motor conveyor remains stationary until activated. ix) Gears are placed onto the conveyor belt and captured by a fixed camera positioned above the setup.

x) Captured gear images are transmitted to the computer for analysis using MATLAB algorithms. xi) MATLAB algorithms process the images and present the results on the command window interface.

xii) Accepted gears are sorted into a designated tray, while rejected ones are redirected using a DC gun motor. xiii) A pushing rod, integrated with the DC gun through a hinge and spring mechanism, facilitates the movement of rejected gears into a separate tray when activated, and returns to its original position automatically.

C. Working

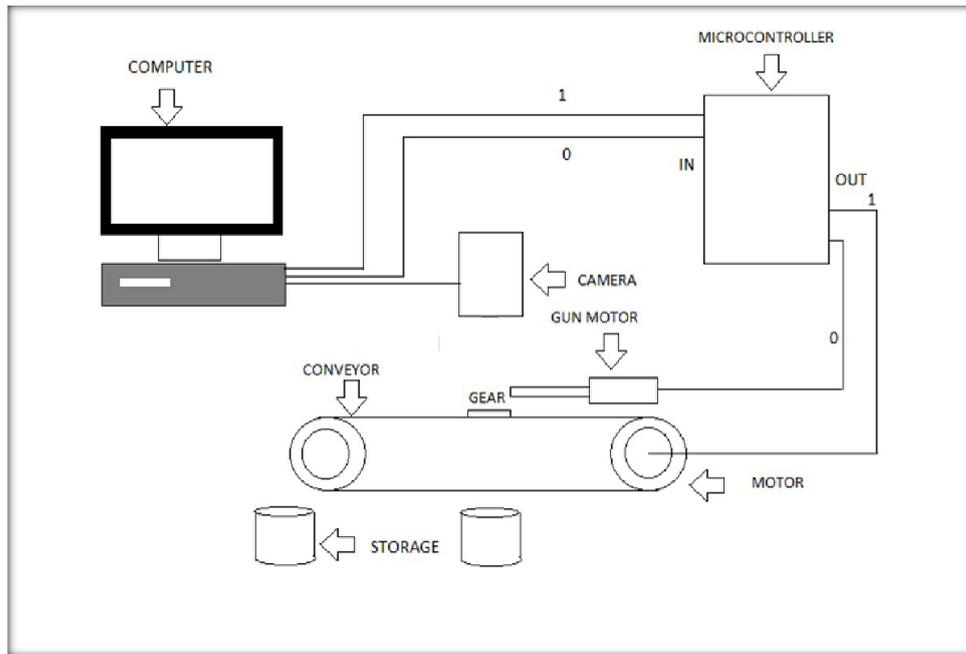

Model Setup

The MATLAB code developed for image processing begins by reading the original gear object image and converting it to grayscale. Then, it calculates the threshold value of the grayscale image to convert it into a binary image. The code includes steps to remove small objects from the binary image and fill any holes in the object to ensure accuracy.

After preprocessing, the code measures the properties of the image object regions and applies convex polygon conversion to these regions. Finally, it creates regions of interest and highlights them with red and yellow lines to indicate the teeth region of the gear object.

Through this process, the code is able to measure the area of the gear object and count the teeth using MATLAB. The code is designed to handle different gear objects by changing the object's name within the code.


The results of the image processing are presented in the results section, showing measurements such as the outer diameter (addendum diameter), inner diameter (dedendum diameter), pitch circle diameter (PCD), module, number of teeth, and tooth height of the gear image object. The code effectively counts the teeth and provides detailed measurements for analysis and evaluation.

4. Results

Upon integrating a virtual terminal or similar component for displaying UART communication in our simulation, we can conveniently access it within the Proteus environment. Upon opening it, we'll encounter the initial prompt sent by the microcontroller, typically something like "Enter 1 or 0 to proceed." This message initiates the interactive testing phase of our simulation, allowing us to evaluate the functionality of the motors and UART communication.

Using the virtual terminal, we can transmit characters directly to the microcontroller. For instance, typing '0' or any other character and sending it through the virtual terminal prompts a response from the microcontroller. If '0' is entered, the microcontroller executes commands to activate the sorting motor and adjust the conveyor motor as per the specified code. Conversely, inputting any other character triggers corresponding logic within the code, thereby altering the behavior of the motors based on the input character.

a) Correct Gear Result:

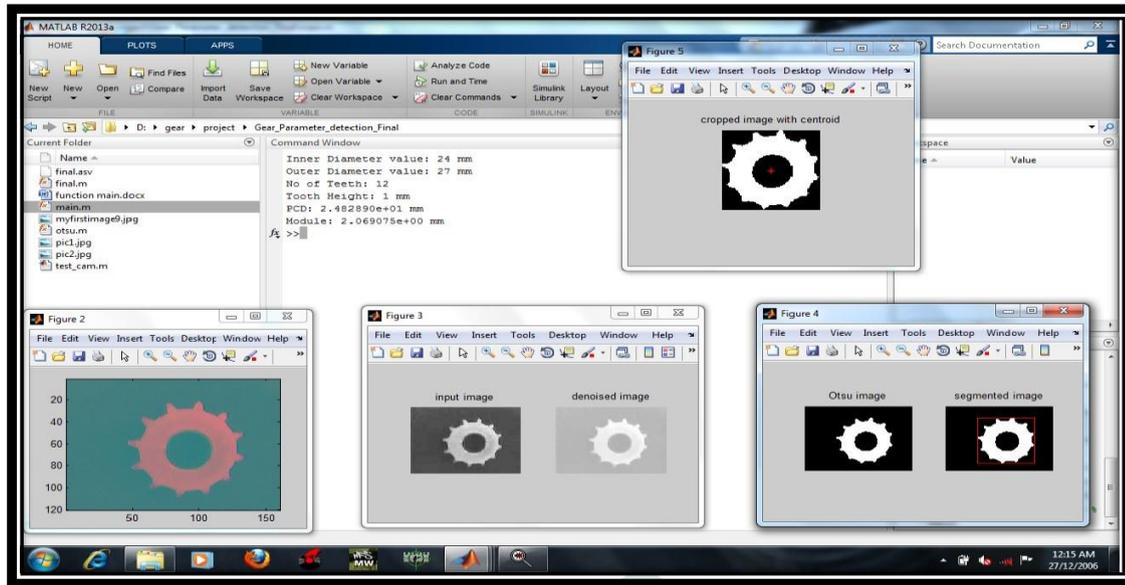


Input Data Validation: Begin by verifying the accuracy and appropriateness of the input data, including gear dimensions, tooth profiles, and other relevant parameters, ensuring they fall within acceptable ranges.

Gear Design Analysis: Utilize mathematical models and calculations to derive the anticipated gear parameters, such as gear ratio, tooth profile, pitch diameter, and other essential characteristics.

Simulation Using MATLAB: Employ MATLAB to conduct a comprehensive simulation of the gear system, incorporating the designed parameters and input conditions to simulate the system's behavior accurately.

Result Validation: Perform a thorough comparison between the simulation results and the expected values derived from the gear design analysis. This step confirms the functionality and correctness of the gear system based on the input data and design specifications.

b) Defective Gear Results:

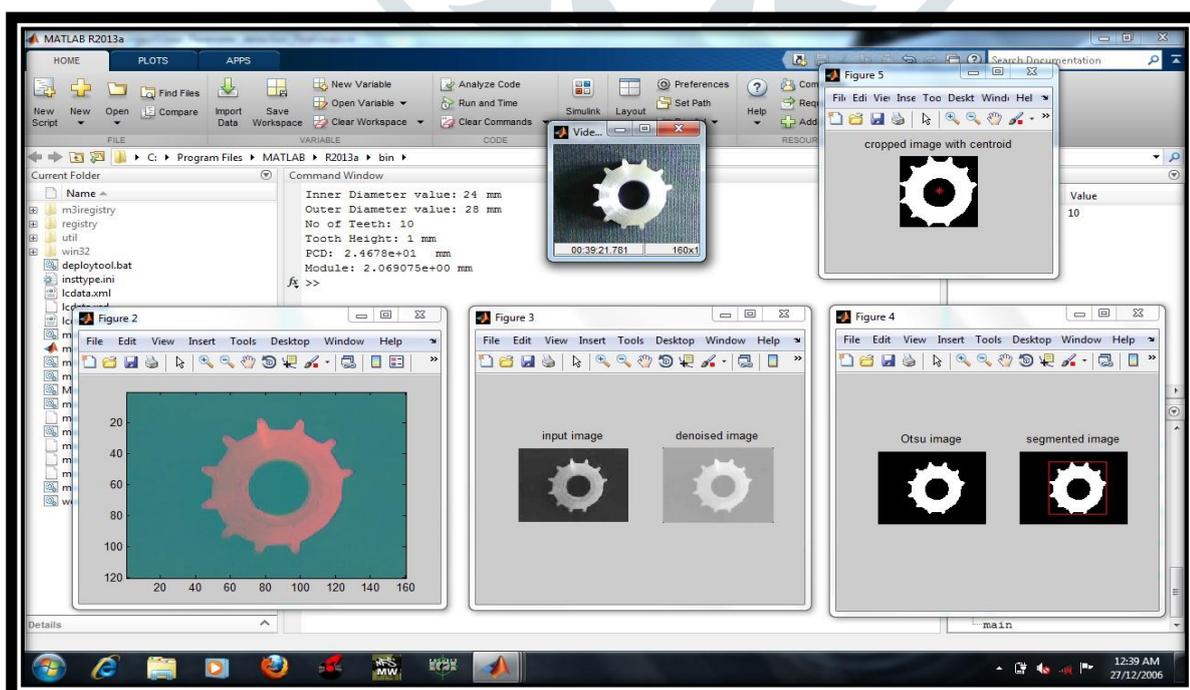

Failure Identification: Begin by analyzing the simulation results using MATLAB to detect any deviations, anomalies, or failures in the gear system's performance that lead to incorrect or suboptimal functioning.

Root Cause Analysis: Utilize MATLAB for in-depth analysis, such as stress analysis, vibration analysis, and other relevant techniques, to pinpoint the root cause behind the identified failures or issues in the gear system.

Remediation Strategies: Develop and implement appropriate strategies to address the root cause of the issues identified in the gear system. This may involve redesigning components, adjusting operating parameters, or implementing other corrective measures as deemed necessary.

Validation of Remediation: Validate the effectiveness of the remediation strategies through additional simulations or physical testing, ensuring that the implemented changes have successfully resolved the identified issues and improved the overall performance of the gear system.

5. Conclusion

Gear area and tooth count are determined using image processing in MATLAB. Five gear images processed with MATLAB code show varying area and teeth count. This demonstrates MATLAB's capability in gear measurement via image processing.

Digital image processing, performed by computers using specific algorithms, holds promise across various fields. Its branches include image transformation, intensification, restoration, segmentation, analysis, and recognition. MATLAB's robust data processing abilities make it a valuable tool in digital image processing.

The combination of MATLAB and image processing technology enables efficient gear inspection, applicable in industries ranging from gear manufacturing to automobile and quality control departments. This technology can be utilized for circular component testing in both small and largescale industries.

In conclusion, image processing technology has wide-ranging applications in manufacturing, automobile, aerospace, medical, biological studies, remote sensing, and computerized photography, highlighting its effectiveness across diverse industries.

6. Acknowledgment

The project, titled “**AI Quality Analysis of Industrial Object by Image Processing**”. The authors would like to thank the Faculty of mechanical, Department of mechanical Engineering, SKNCOE Sinhgad Technical Institute Lot, Pune for its support and stimulant throughout the process of conducting this study.

7. References

1. Milica Babica, Mojtaba A. Farahania and Thorsten Wuesta,” Image Based Quality Inspection in Smart Manufacturing Systems: A Literature Review”, Volume 103, 2021, Pages 262-267.
2. Shivani Bhoir, Sagar Mhatre, Pranali Bhowte and Sairaj Raut,” Design and Manufacturing of Gear Error Profile Detector”, INTERNATIONAL RESEARCH JOURNAL OF ENGINEERING AND TECHNOLOGY (IRJET), VOLUME: 07 ISSUE: 03, MAR 2020.
3. H. Alkhadafe, A Al-Habaibeh and A. Lotfi,” Condition Monitoring of Helical Gears using Automated Selection of Features and Sensors”, Volume 93, November 2016, Pages 164-177.
4. Nematullo Rahmatov, Anand Paul, Faisal Saeed, Won-Hwa Hong, HyunCheol Seo and Jeonghong Kim,” Machine learning–based automated image processing for quality management in industrial Internet of Things”, International Journal of Distributed Sensor Networks 2019, Vol. 15(10),
5. Zhenxing Xu, Aizeng Wang, Fei Hou and Gang Zhao,” Defect detection of gear parts in virtual manufacturing”, 2023 Mar 29.
6. Abdallah A. Alshennawy, and Ayman A. Aly, 2019,” Edge Detection in Digital Images Using Fuzzy Logic Technique”, International Scholarly and Scientific Research & Innovation, Vol:3, No:3, 2009.

7. Wilson Wang, 2008," An Intelligent System for Machinery Condition Monitoring", IEEE, VOL. 16, NO. 1, FEBRUARY 2008.
8. Zhang Jie, Ma Shuyuan, Huang Jie, and Long Zhenhai. 2012. "A Machine Vision System for Real-time Automated Gear Fatigue Pitting Detection.", Proceedings of 2012 International Conference on Mechanical Engineering and Material Science (MEMS 2012).
9. MD. Hazrat ALI, Syuhei KUROKAWA and Kensuke UESUGI. 2013. "Vision Based Measurement System for Gear Profile", IEEE,2013.

10. Hoang Thai Son Nguyen, Duy Anh Nguyen and Tan Tien Nguyen, 2011," DAMAGE INSPECTION OF WIPER BLADES USING IMAGE PROCESSING TECHNIQUES", ASEAN Engineering Journal Part A, Vol 1 No 1, ISSN 2229-127X p.52.
11. Y. Jiang, B. Tang, Y. Qin and W. Liu, "Feature extraction method of wind turbine based on adaptive Morlet wavelet and SVD," Renewable Energy, vol. 36, pp. 2146-2153, 8, 2011.
12. 12.Q. He, F. Kong and R. Yan, "Subspace-based gearbox condition monitoring by kernel principal component analysis," Mechanical Systems and Signal Processing, vol. 21, pp. 1755-1772, 5, 2007.
13. M. J. Zuo, J. Lin and X. Fan, "Feature separation using ICA for a one-dimensional time series and its application in fault detection," J. Sound Vibrat., vol. 287, pp. 614-624, 10/22, 2005.
14. S.J. Loutridis "Damage detection in gear systems using empirical mode decomposition" Department of Electrical Engineering, School of Technological Applications, Technological Institute of Larissa, GR 41-110 Larissa, Greece Received 16 February2004;
15. Renata Klein n, Eyal Masad, Eduard Rudyk, Itai Winkler Bearing diagnostics using image processing methods R.K. Diagnostics, Gilon, P.O.B. 101, D.N. Misgav 20103, Israel
16. V.S.Panwar1, S.P.Mogal "A CASE STUDY ON VARIOUS DEFECTS FOUND IN A GEAR SYSTEM" p-ISSN: 2395-0072 Volume: 02 Issue: 03 | June-2015
17. Sanjana H K2 , Soniya M G3 , Sunitha N R4 , Vismitha P V "Quality Management of Mechanical Parts using Image Processing" Vol 8(2),253-256
18. Frank Härtig Christian Keck Karin Kniel "oncept for A Novel Concept for High Accuracy Gear Calibration" GEAR TECHNOLOGY • MAY/JUNE 2005
19. Amandeep Mavi1 , Mandeep Kaur2 "Identify Defects in Gears Using Digital Image Processing" ISSN: 2278-067X, Volume 1, Issue 6 (June 2012), PP.49-55 www.ijerd.com
20. E.S. Gadelmawla 1 "Computer vision algorithms for measurement and inspection of spur gears" 31 March 2010